

# 10.4" LCD RACK MOUNT MONITOR (5U)



- 10.4" TFT LCD display (1024 x 768 resolution) in only 5U (8.75") of rack space.
- ARGB (Analog RGB) and DVI-D signal inputs (optional S-Video/Composite Video inputs).
- Housed in rugged steel construction with a black powder coat finish.
- Supplied with VGA cables, AC/DC adapter and power cord.
- Optional Lexan™ screen protection available (L).

## GENERAL SPECIFICATIONS


- Dimensions:**  
19.0" (W) x 8.75" (H) x 2.40" (D).
- Weight:**  
10 lbs
- Power:**  
110 - 240 VAC, 50/60 Hz.  
60 Watts max.
- On-Screen Controls:**  
Brightness, Contrast, Horizontal & Vertical Position, Auto Adjust, OSD H & V Position, Input Select Color Temp., Reset.
- Plug & Play:**  
DDC1 and DDC2B
- Temperature:**  
Operating: 0°C to 50°C  
Storage: -20°C to 60°C
- Humidity:**  
Operating: 10 to 90% RH (max)
- Input Signal (VGA):**  
R.G.B. analog video, TTL H & V sync.
- Input Signal (Digital):**  
DVI-D (TDMS).
- Input Connectors:**  
Analog: 15 pin mini D-Sub.  
Digital: 24 pin DVI-D.
- Colors Available:**  
Black.
- Specifications subject to change without notice.

## DISPLAY SPECIFICATIONS (APPLY TO EACH DISPLAY)

- Display Type:**  
Active matrix TFT LCD
- Display area:**  
10.4" Diagonal.
- Colors Displayed:**  
262K colors.
- Contrast Ratio:**  
500:1 typ.
- Brightness:**  
350 cd/m<sup>2</sup> typ.
- Viewing Angle:**  
Horizontal: 178°  
Vertical: 178°
- Response Time:**  
40ms Typ.
- Resolution:**  
VGA up to 1024 x 768.
- Horizontal Frequency:**  
31.5 to 80KHz.
- Vertical Frequency:**  
56 to 75 Hz.
- Screen Protection:**  
Lexan™ optional.

## MODEL NUMBER

KVMRMM-101(x)(x)

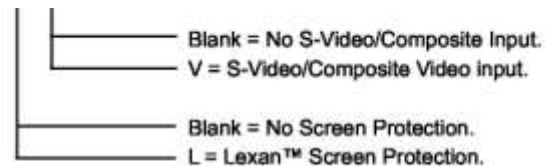

Contact us about other options and our additional rack mount products.

