

CV-401 / CV-801 / CV-1601



Designed for:





PS/2 DB-15 KVM Benefits

- ▶ PS/2 DB-15 KVM with either 4, 8 or 16 ports in 1U
- ▶ Mix PS/2, USB & SUN with Multi-Platform switch capability
- ▶ Low cost reliable PS/2 based server management
- ▶ No software or drivers required
- ▶ Easy & quick installation

Switch Features & Options

- Multi lingual on screen display menu
- Advanced user profiles and configurable OSD hot key combinations
- Dual power with failover

DC 12V, 24V and 48V DC Power options

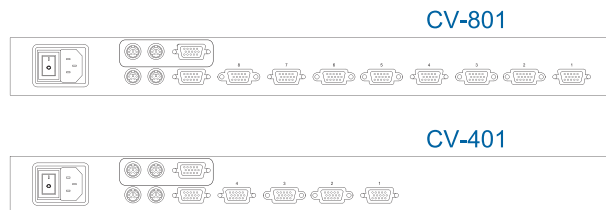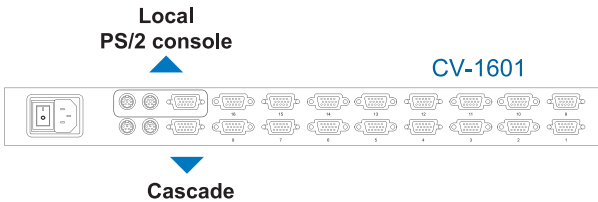

Technical Specification

- **KVM Port :** 16 / 8 / 4 x DB-15 connector
- **KVM Cable :** PS/2 3-in-1 KVM cable, up to 6, 10, 15 & 33 feet
- **Local Console :** 1 x DB-15 VGA (up to 1600 x 1200), 2 x PS/2 for KB & MS
- **Expansion :** Up to 128 servers by 8-level cascade
- **Compatibility :** Mix PCs, SUNs, MACs, IBMs, HPs, DELLs server
Windows Vista / 2003 / XP / 2000, Linux, Netware, Unix

- **Power :** 100~240VAC, 50 / 60Hz 0.3A via IEC type cord (12V / 24V / 48V DC input option)
- **Regulatory Approval :** FCC, CE
- **Environmental**
Operating / Storage : 0 to 50°C / -5 to 60°C
Relative humidity : 90%, non-condensing
Shock : 50G peak acceleration (11 ms, half-sine wave)
Vibration : 58~100Hz / 0.98G (11ms / cycle)

Accessories

CD-6 CD-15
CD-10 CD-33
PS/2 3-in-1 KVM cable - 6, 10, 15 & 33 ft



SUN-31 kit
PS/2 to SUN / USB adapter



CA-6
6ft PS/2 KVM cascade cable



Dimensions

Model	Product Dimension (W x D x H)	Packing Dimension (W x D x H)	Net Weight	Gross Weight
CV-401	446 x 200 x 44 mm 17.6 x 7.9 x 1.73 inch	510 x 400 x 77 mm 20.1 x 15.7 x 3 inch	3.5 kg / 8 lbs	4 kg / 9 lbs
CV-801 / 1601	446 x 180 x 44 mm 17.6 x 7.1 x 1.73 inch	510 x 400 x 77 mm 20.1 x 15.7 x 3 inch	4 kg / 9 lbs	4.5 kg / 10 lbs