

SB-5658K

1x8 HDMI 4K2K Distribution Amplifier with Scaler

4K|2K
CAPABLE



IMPORTANT WARRANTY INFORMATION.

If you remove the HDMI screw posts, you must use the provided HDMI Locking Post replacement screws to keep the internal HDMI jack secure. Removing the HDMI screws without installing the HDMI Locking Post replacement screws will void your warranty.



SAFETY INFORMATION



1. To ensure the best results from this product, please read this manual and all other documentation before operating your equipment. Retain all documentation for future reference.
2. Follow all instructions printed on unit chassis for proper operation.
3. To reduce the risk of fire, do not spill water or other liquids into or on the unit, or operate the unit while standing in liquid.
4. Make sure power outlets conform to the power requirements listed on the back of the unit. Keep unit protected from rain, water and excessive moisture.
5. Do not attempt to clean the unit with chemical solvents or aerosol cleaners, as this may damage the unit. Dust with a clean dry cloth.
6. Do not use the unit if the electrical power cord is frayed or broken. The power supply cords should be routed so that they are not likely to be walked on or pinched by items placed upon or against them, paying particular attention to cords and plugs, convenience receptacles, and the point where they exit from the appliance.
7. Do not force switched or external connections in any way. They should all connect easily, without needing to be forced.
8. Always operate the unit with the AC ground wire connected to the electrical system ground. Precautions should be taken so that the means of grounding of a piece of equipment is not defeated.
9. AC voltage must be correct and the same as that printed on the rear of the unit. Damage caused by connection to improper AC voltage is not covered by any warranty.
10. Turn power off and disconnect unit from AC current before making connections.
11. Never hold a power switch in the "ON" position.
12. This unit should be installed in a cool dry place, away from sources of excessive heat, vibration, dust, moisture and cold. Do not use the unit near stoves, heat registers, radiators, or other heat producing devices.
13. Do not block fan intake or exhaust ports. Do not operate equipment on a surface or in an environment which may impede the normal flow of air around the unit, such as a bed, rug, carpet, or completely enclosed rack. If the unit is used in an extremely dusty or smoky environment, the unit should be periodically "blown free" of foreign dust and matter.
14. To reduce the risk of electric shock, do not remove the cover. There are no user serviceable parts inside. Refer all servicing to qualified service personnel. There are no user serviceable parts inside.
15. When moving the unit, disconnect input ports first, then remove the power cable; finally, disconnect the interconnecting cables to other devices.
16. Do not drive the inputs with a signal level greater than that required to drive equipment to full output.
17. The equipment power cord should be unplugged from the outlet when left unused for a long period of time.
18. Save the carton and packing material even if the equipment has arrived in good condition. Should you ever need to ship the unit, use only the original factory packing.
19. Service Information Equipment should be serviced by qualified service personnel when:
 - A. The power supply cord or the plug has been damaged.
 - B. Objects have fallen, or liquid has been spilled into the equipment.
 - C. The equipment has been exposed to rain.
 - D. The equipment does not appear to operate normally, or exhibits a marked change in performance.
 - E. The equipment has been dropped, or the enclosure damaged.

TABLE OF CONTENTS

HDMI-4K2K Distribution Amplifier series

Thank you for purchasing the SB-5658K HDMI Distribution Amplifier with Scaler. You will find this unit easy to install and highly reliable but it is essential that you read this manual thoroughly before attempting to use the 1x8 HDMI 4K2K Distribution Amplifier.

CONTENTS

INTRODUCTION	1
FEATURES & CONTENTS.....	2
SPECIFICATIONS	3
FRONT PANEL	4
BACK PANEL	5
REMOTE CONTROL	6
EDID FUNCTIONS	7
IR EXTENDER	9
TYPICAL APPLICATION	10
RS-232 PROTOCOL & COMMANDS	11

INTRODUCTION

The SB-5658K is a professional 1x8 4K2K HDMI Distribution Amplifier with Scaler. Supporting (1) HDMI Input and (8) HDMI 4K2K Outputs. This unit is based on HDMI standards and supports full UHD 4K2K resolution HDMI video with (3) embedded EDID modes. With a video signal bandwidth of 340Mhz, there is no signal degradation. High Definition Digital signals can be distributed from the (1) Input to (8) Outputs. The distributor is certified as being fully CEC and HDCP 1.4 compliant, full UHD 4K2K HDMI V1.4a 3D formats. Using the build-in HDMI signal booster function, the HDMI output is capable of driving cable lengths for 1080p up to 98 feet (30M) & 4K2K up to 66 feet (20M). Supports UXGA/WUXGA DVI 1920x1200 resolution to any HD DVI displays. The EDID management can be selected between (3) different modes 1080p-2ch/1080-bitstream/4K2K-bitstream and (2) mode scaler management for scaling up to 4K2K (24Hz) and scaling down to 1080p (24Hz). Control is provided via front panel push buttons.

SAFETY PRECAUTIONS

Please read all instructions before attempting to unpack, install or operate this equipment and before connecting the power supply. Please keep the following in mind as you unpack and install this equipment:

- Always follow basic safety precautions to reduce the risk of fire, electrical shock and injury to persons.
- To prevent fire or shock hazard, do not expose the unit to rain, moisture or install this product near water.
- Never spill liquid of any kind on or into this product.
- Never push an object of any kind into this product through any openings or empty slots in the unit, as you may damage parts inside the unit.
- Do not attach the power supply cabling to building surfaces.
- Use only the supplied power supply unit (PSU). Do not use the PSU if it is damaged.
- Do not allow anything to rest on the power cabling or allow any weight to be placed upon it or any person walk on it.
- To protect the unit from overheating, do not block any vents or openings in the unit housing that provide ventilation and allow for sufficient space for air to circulate around the unit.

DISCLAIMERS

The information in this manual has been carefully checked and is believed to be accurate. We assume no responsibility for any infringements of patents or other rights of third parties which may result from its use.

We assume no responsibility for any inaccuracies that may be contained in this document. We make no commitment to update or to keep current the information contained in this document.

We reserve the right to make improvements to this document and/or product at any time and without notice.

COPYRIGHT NOTICE

No part of this document may be reproduced, transmitted, transcribed, stored in a retrieval system, or any of its part translated into any language or computer file, in any form or by any means — electronic, mechanical, magnetic, optical, chemical, manual, or otherwise — without express written permission and consent.

© Copyright 2016. All Rights Reserved.

Version 1.5 JULY 2016

5658K-20150824-003



TRADEMARK ACKNOWLEDGMENTS

All products or service names mentioned in this document may be trademarks of the companies with which they are associated.

LOOK A PUPPY!!

NOW READ THIS!!

IMPORTANT WARRANTY INFORMATION.

If you remove the HDMI screw posts, you must use the provided HDMI Locking Post replacement screws to keep the internal HDMI jack secure. Removing the HDMI screws without installing the HDMI Locking Post replacement screws will void your warranty.



FEATURES

FEATURES

- (1) HDMI UHD 4K2K Input to (8) HDMI UHD 4K2K Output Distribution Amplifier
- HDMI digital video w/ embedded HDCP, DVI format and CEC/HDCP 1.4 compliant
- Build-in (3) worldwide embedded EDID modes control HDMI full UHD 4K2K (24/25/30Hz) resolutions
- Supports TMDS clock rate up to 300MHz
- Wide range of HD DVI resolutions from PC XGA to WUXGA 1920x1200 and HDTV/DTV
- Supports HDMI resolutions 480i/480p, 576i/576p, 720p, 1080i/p & 4K2K (24/25/30Hz)
- Digital Video TMDS formats for resolutions up to 4K2K with Deep color 36-bit
- Scaling up to 4K2K@30Hz Mode: Supports Input 1080p@30Hz resolution only
- Scaling down to 1080p@30Hz Mode: Supports Input 4K2K@30Hz resolution only
- Digital Multi-Channel Audio Support: Dolby TrueHD, Dolby Digital, Dolby Digital Plug/ex, DTS, DTS-HD, DTS-HD Master, DTS-EX, PCM, PCM2, LPCM2
- Various User Interface controls via front panel push button
- Supports (2) worldwide control function keys via front panel controls: Select / Enter
- Supports (3) embedded EDID Modes: 1080p-2ch / 1080 bitstream / 4K2K-bitstream
- Supports (2) Scaling Up / Down Modes: Down to 1080p (24Hz) / Up to 4K2K-(24Hz)
- HDMI Signal Booster: For 1080p distance of 98 feet (30M) and 4K2K distance of 65 feet (20M)
- Automatic LED show out via press the select function button
- Supports universal switch power adaptor AC100V~AC240V, 50/60Hz

The Distributor will remember that last state during a power cycle. When power is removed and resorted, the last configuration will be invoked.

PACKAGE CONTENTS

Check that you have the following components:

- SB-5658K Matrix Switcher
- RS-232 V2.0 Protocol Instructions
- IR Remote Control (SW-5658K)
- 19 inch Ear mount bracket (Part # 1U-440L)
- SB-100 IR Extender Receiver Set
- HDMI Locking Post Replacement Screws
- Users Guide
- Power Supply Input: Worldwide Universal 100~240VAC, AC 50/60Hz
- *Optional: SB-100C IR Extender Receiver Cable (6.5ft (2M))*



SPECIFICATIONS


SPECIFICATIONS

- **Type of HDMI DA:** (1) Input to (8) Outputs HDMI Matrix Switcher
- **HDMI Support:** HDMI 4K2K, 1080p-@60Hz, H36-bit Deep color, 3D of HDMI V1.4 formats
- **HDCP / CEC Support:** HDCP 2.2 Compliant, CEC Compliant
- **Video Bandwidth:** Clock Data Rates: 300Mhz
- **Digital Video Support:** HD: 480i/ 480p/ 720p/ 1080i/p and 4K2K up to 36bit deep color
- **HDMI Input:** (1) HDMI (HDMI or DVI digital source)
- **HDMI Outputs:** (8) HDMI (to Destination)
- **Audio Outputs:** Multi-channel Audio Formats 5.1 / 7.1, MAT(MLP), Dolby Digital, Dolby TrueHD, Dolby Digital Plus, DTS, DTS-ES 6CH, DTS-HD, DTS-HD-HRA, DTS-HD Master, (PCM-2CH)
- **Controls:**
 - Select Function button on front panel (Data status via LED panel show out)
 - Enter function button (confirms entries)
- **EDID-Scaling Status:** EDID & Scaling status LEDs indicates presence of a live signal
- **Control Status:** Control status LEDs indicates presence of a live signal
- **(2) Function Control Keys:**
 - 1. Select button
 - 2. Enter button
- **(3) EDID Management:** Select Embedded EDID Modes:
 - Mode1: 1080p60Hz-2ch
 - Mode2: 1080p@60Hz-Bitstream
 - Mode3: 4K2K-2160p@30H-Bitstream
- **(2) Scaling Function Mode:** Select Scaling down or scaling up
 - Mode1: Down-Scaling to 1080p@24Hz mode requires a source Input signal of 4K2K@24Hz
 - Mode2: Up-Scaling to 4K2K-2160p@24H mode requires a source Input signal of 1080p-24Hz
- **Infrared Frequency:** 38Khz
- **HDMI Signal Booster:** Signal for 1080p distance of 98 ft/30M max / Signal for 4K2K distance of 65 ft/20M max
- **HDMI I/O Connector:** HDMI Type A - SMD 19pin female type
- **Temperature:** 32°F - 100°F Operation (0°C - 38°C)
- **Dimensions (LxWxH):** 17.5 x 8 x 1.75 in
- **Rack Mount:** 19 inch 1U High Rack Mount bracket (P/N: 1U-440L)
- **Power Supply:** AC 100~240VAC 50/60Hz (universal type supply)
- **Safety Approvals:** CE, FCC, RoHS, REACH
- **Weight:** 5.3 lb (Unit only) / 7.5 lb (Net)

As product improvements are continuous, specifications are subject to change and without notice.

FRONT PANEL

FRONT PANEL

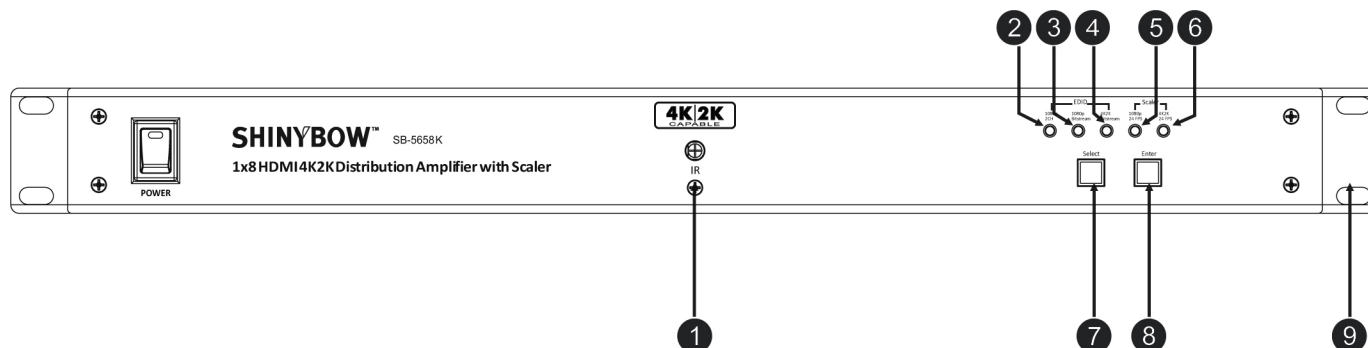

1. IR SENSOR: The IR sensor receives IR commands from the supplied remote controller or third party IR emitter

2. INPUT STATUS DISPLAY: Input source LEDs illuminate blue to indicate that a video source is present on that input

3. OUTPUT STATUS DISPLAY: Output Destination 1 to 8 LEDs illuminate blue to indicate that a video source is present on that output

4. EDID MODE 1: 1080P-2CH: Digital video 1080p (1920x1080) @60Hz

Digital Audio Multi-Channel Audio 2CH

5. EDID MODE 2: 1080P-BITSTREAM: Digital video 1080p (1920x1080) @60Hz

Digital Audio Multi-Channel Audio: Multi Audio formats 5.1 / 7.1, MAT(MLP), Dolby Digital, Dolby TrueHD, Dolby Digital Plus, DTS, DTS-ES 6CH, DTS-HD, DTS-HD-HRA, DTS-HD Master, (PCM-2CH)

6. EDID MODE 3 : 4K2K-BITSTREAM: Digital video 4K2K (3860x2160) @24/25/30Hz

Digital Audio Multi-Channel Audio: Multi Audio formats 5.1 / 7.1, MAT(MLP), Dolby Digital, Dolby TrueHD, Dolby Digital Plus, DTS, DTS-ES 6CH, DTS-HD, DTS-HD-HRA, DTS-HD Master, (PCM-2CH)

7. SCALER MODE 1: 1080P-24HZ: Digital video 1080p (1920x1080) @24Hz

Digital Audio Multi-Channel Audio: Multi Audio formats 5.1 / 7.1, MAT(MLP), Dolby Digital, Dolby TrueHD, Dolby Digital Plus, DTS, DTS-ES 6CH, DTS-HD, DTS-HD-HRA, DTS-HD Master, (PCM-2CH)

8. SCALER MODE 2: 4K2K-24HZ: Digital video 4K2K (3860x2160) @24Hz

Digital Audio Multi-Channel Audio: Multi Audio Formats 5.1 / 7.1, MAT(MLP), Dolby Digital, Dolby TrueHD, Dolby Digital Plus, DTS, DTS-ES 6CH, DTS-HD, DTS-HD-HRA, DTS-HD Master, (PCM-2CH)


9. SELECT BUTTON: Used to select EDID modes.

10. ENTER BUTTON: Press ENTER to confirm entries.

11. 19 INCH EAR MOUNT PAIR: Converts desktop to 19 inch rack mount. Bracket (part number: 1U-440L) INCLUDED. Image shows rack mount bracket attached

BACK PANEL

BACK PANEL

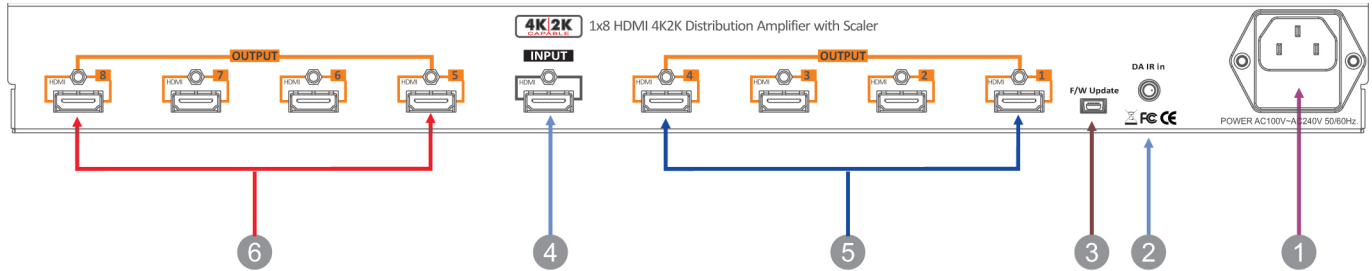

1. DC POWER INLET: The switcher is fitted with a AC power plug input connector. Ensure that the plug used is of an approved type and is of sufficient current carrying connector capacity with the correct voltage and connector polarity. 100~240Volt AC, 50/60Hz power supply.

POWER SOCKET:

Connector Type: IEC 60320 C13



2. IR EXTENDER CONTROL: Supports one IR extender. Extends a maximum distance ~984 ft/300M. When you plug the external IR extender into the distributor, the front panel IR receiver remains active.

DA IR in



DA Control

IR EXTENDER JACK: Female Jack - inner OD Ø 3.5mm

3. RS-232 CONNECTION: RS-232 control port allows for interfacing to a PC, such as a computer or touch panel control, to the switcher via the DB-9pin female connector for serial RS-232 control.

F/W update




This port also for Firmware updates.

REMOTE PORT: D-SUB-9pin female connector

4. HDMI INPUT - (1) PORT: Connects a HDMI source signal to this Input. This HDMI port supports HDMI with embedded digital multi-channel audio and DVI sources. If you remove the HDMI screw posts, you must use the provided HDMI Locking Post replacement screws to keep the internal HDMI jack secure. Removing the HDMI screws without installing the HDMI Locking Post replacement screws will void your warranty.

HDMI in




HDMI CONNECTOR: HDM Type A SMD 19pin female socket connector

Note: With the proper adapters, the distributor can be used with DVI digital video signals.

5. HDMI OUTPUTS - 1-4 PORTS: Connects a HDMI source signal to this Output. This HDMI port supports HDMI with embedded digital multi-channel audio and DVI sources. If you remove the HDMI screw posts, you must use the provided HDMI Locking Post replacement screws to keep the internal HDMI jack secure. Removing the HDMI screws without installing the HDMI Locking Post replacement screws will void your warranty.

HDMI out




HDMI CONNECTOR: HDM Type A SMD 19pin female socket connector.

Note: With the proper adapters, the distributor can be used with DVI digital video signals.

6. HDMI OUTPUTS - 5-8 PORTS: Connects a HDMI source signal to this Output. This HDMI port supports HDMI with embedded digital multi-channel audio and DVI sources. If you remove the HDMI screw posts, you must use the provided HDMI Locking Post replacement screws to keep the internal HDMI jack secure. Removing the HDMI screws without installing the HDMI Locking Post replacement screws will void your warranty.

HDMI out



HDMI CONNECTOR: HDM Type A SMD 19pin female socket connector

Note: With the proper adapters, the distributor can be used with DVI digital video signals.

REMOTE CONTROL

Before making any connections observe the following:

- Ensure the main voltage supply matches the label on the supplied plug-pack (+/-10%).
- Ensure that the power switch is OFF.
- Ensure that all system grounds (earth) are connected to a common point.
- Avoid powering equipment within a system from multiple power sources that may be separated by large distances.
- Connect all audio video sources and destination equipment.
- Power up all source and destination audio-visual sources.
- For each destination output select the appropriate input source by using the front panel input select buttons. The supplied IR remote control. Or through the RS-232 serial communications port.
- Upon powering up the switcher, it will return to its last used setting before being powered down.

REMOTE CONTROL

1. & 2. SWITCH POWER ON or OFF: Controller with a power ON and OFF

3. 1080P-24 FPS


4. 4K2K-24 FPS

5. 1080P-2CH

6. 1080P-BITSTREAM

7. 4K2K-BITSTREAM

8. ENTER

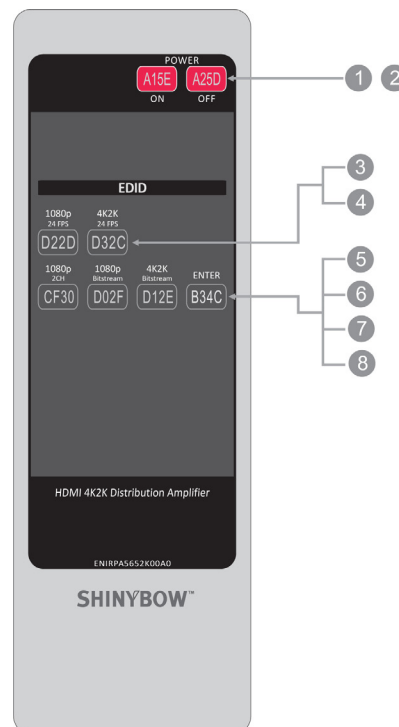

IR REMOTE CUSTOM AND DATA CODES (NEC Standard)

HOW TO SETUP IR CODES: CUSTOM CODE : 59A6

POWER ON	: 59A6 A15E
POWER OFF	: 59A6 A25D
1080p-24 fps	: 59A6 D22D
4K2K-24 fps	: 59A6 D32C
1080p-2CH	: 59A6 CF30
1080p-BitStream	: 59A6 D02F
4K2K-BitStream	: 59A6 D12E
ENTER	: 59A6 B34C

EDID FUNCTION

EMBEDDED EDID & SCALER MODES FOR HDMI DISTRIBUTION AMPLIFIER

EDID / SCALER SETUP	To Change The EDID & Scaler Modes
	The display will show the currently selected EDID mode
Step 1. Press SELECT button	The button will flash blue and the display will show the current Embedded EDID & Scaler Status .
Step 2. Press the ENTER button	To set EDID & Scaler mode: The switcher will return to operation mode.
Operation will abort if no keys are pressed within 5 seconds.	
EMBEDDED EDID & SCALER MODES	To Select Embedded EDID Mode Or Scaler Mode
Embedded EDID setup Press SELECT > ENTER button <u>Select Embedded EDID:</u> Mode 1 : 1080p-2ch Mode 2 : 1080p-Bitstream Mode 3 : 4K2K-Bitstream <u>Select Scaler Modes:</u> Mode 1 : 1080p-24Hz Mode 2 : 4K2K-24Hz	The button will flash blue and the display will show the current Embedded EDID & Scaler Status . Press SELECT button: The LED will show the current EDID & Scaler status. Repeatedly pressing the SELECT button will cycle modes thru the options.
RESET	(EDID Return To Factory Default)
How to RESET EDID mode Press ENTER button	Operation will abort if keep pressed the ENTER button after 5 seconds. RESET to the FACTORY DEFAULT. Mode-1: The EDID will return to 1080p-2CH.

EDID FUNCTION

EDID MODE RESOLUTION & MULTI-CHANNEL AUDIO FORMATS:


EDID MODES:	RESOLUTIONS:	MULTI-CHANNEL FORMATS:
Mode # 1	1080p@60Hz (NATIVE), 1080p@50Hz, 1080p@30Hz, 1080p@25Hz, 1080p@24Hz, 1080i@60Hz, 1280x720@60Hz, 720p@60Hz, 720i@60, 480p@60	LPCM-2ch, 32kHz ~ 48kHz, 16/20/24 bits
Mode # 2	1080p@60Hz (NATIVE), 1080p@50Hz, 1080p@30Hz, 1080p@25Hz, 1080p@24Hz, 1080i@60Hz, 1280x720@60Hz, 720p@60Hz, 720i@60, 480p@60	LPCM-8ch, 32kHz ~ 192kHz, 16/20/24 bits AC-3 6ch, 32kHz ~ 192kHz, 640kHz DTS 6ch, 32kHz ~ 192kHz, 1536kHz Dolby+-8ch, 32kHz ~ 192kHz DTS-HD 8ch, 32kHz ~ 192kHz
Mode # 3	2160p@24Hz (3860x2160p) 4K2K	LPCM-8ch, 32kHz ~ 192kHz, 16/20/24bits AC-3 6ch, 32kHz ~ 192kHz, 640kHz DTS 6ch, 32kHz ~ 192kHz, 1536kHz Dolby+-8ch, 32kHz ~ 192kHz DTS-HD 8ch, 32kHz ~ 192kHz

SCALER MODE RESOLUTION & MULTI-CHANNEL AUDIO FORMATS:

EDID MODES:	RESOLUTIONS:	MULTI-CHANNEL FORMATS:
Mode # 1	1080p@60Hz 1920x1080p	LPCM-8ch, 32kHz ~ 192kHz, 16/20/24bits AC-3 6ch, 32kHz ~ 192kHz, 640kHz DTS 6ch, 32kHz ~ 192kHz, 1536kHz Dolby+-8ch, 32kHz ~ 192kHz DTS-HD 8ch, 32kHz ~ 192kHz
Mode # 2	2160p@24Hz (NATIVE) 2160p@25Hz 2160p@30Hz 4K2K (3860x2160)	LPCM-8ch, 32kHz ~ 192kHz, 16/20/24bits AC-3 6ch, 32kHz ~ 192kHz, 640kHz DTS 6ch, 32kHz ~ 192kHz, 1536kHz Dolby+-8ch, 32kHz ~ 192kHz DTS-HD 8ch, 32kHz ~ 192kHz


IR EXTENDER

1. SB-100 IR 300M Receiver

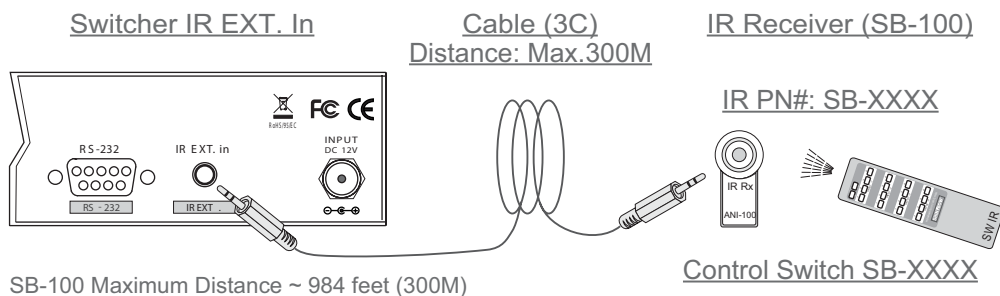

The SB-100 IR Receiver is required when using the port "ALL in" Jack.


2. SB-100C IR 2M Receiver

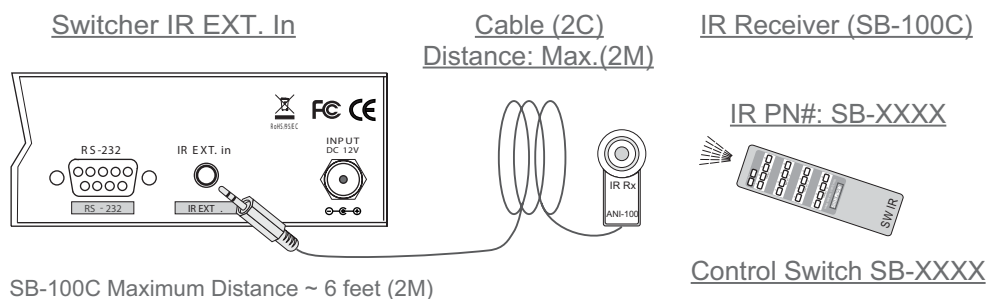

The SB-100C IR Receiver will not function on the port "ALL in" Jack.


*** When you plug the External IR extender into the switcher, the front panel IR receiver remains active. ***

Pin configuration for IR 984 feet (300M) Extender Receiver such as SB-100 compatible

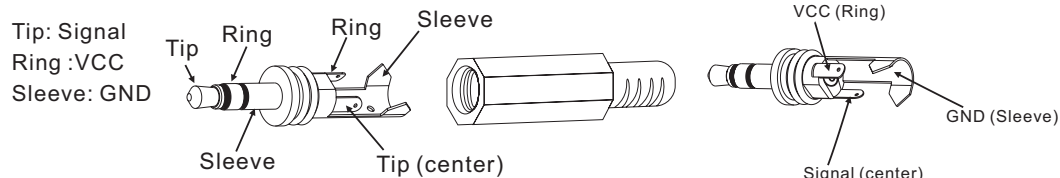

SB-100 Receiver and SB-101 Transmitter The DISTANCE maximum ~ 984 feet (300M)

Pin configuration for IR Receiver 6 feet (2M) cable such as SB-100C compatible

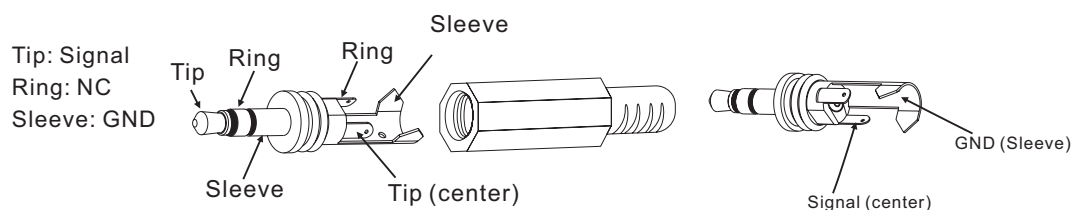

SB-100 Receiver and SB-101C Transmitter The DISTANCE maximum ~ 984 feet (300M)

Note: The External IR jack has voltage on the "Ring" portion of a 3-conductor plug. You must use a 3-conductor plug (aka: stereo plug). Using a 2-conductor plug will short out the power supply. Always make connections with the switcher power off.

TYPICAL APPLICATION


INSTALLING DIAGRAM

Samples Connection:

1. Using the external IR to control the SB-5658K distributor via PC and SB-100 IR receiver to transmit the SB-5658K's IR signal.
2. Using a Mini-USB update to update the distributor via a PC.
3. Using the press buttons to select the Embedded EDID modes or Scaler modes to control the HDMI distribution amplifier SB-5658K via **SELECT** and **ENTER** press buttons.

NOTE:

1. Distributor IR External Port: Use SB-100 IR signal Receiver
2. Update TX/RX chip Firmware via a PC USB
3. Scaling Up 4K2K@24Hz Mode: Supports 1080p@24Hz Input resolution only
4. Scaling Down 1080p@24Hz Mode: Supports 4K2K@24Hz Input resolution only

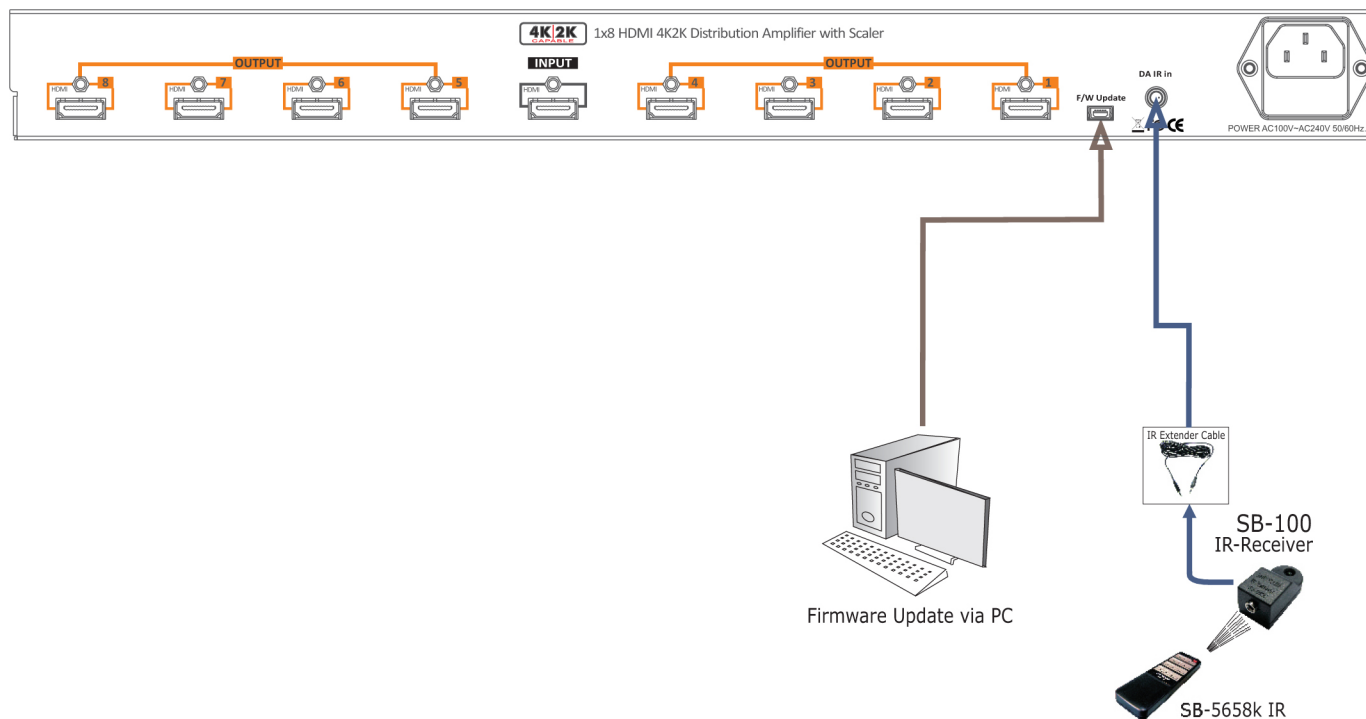

Application uses 1080p or 4K2K HDTV via 1x8 Distribution Amplifier with Scaler.

RS-232 SERIAL INTERFACE PROTOCOL AND COMMAND

RS-232 SERIAL INTERFACE CONNECT

RS-232 CONFIGURATION

RS-232 cable is a straight thru cable and not null-modem

SB Device

BAUD RATE: 9600, 8, n, 1


FORMAT: [Command][][Data][;]

1. Command

2. Space


3. Data

4. ;

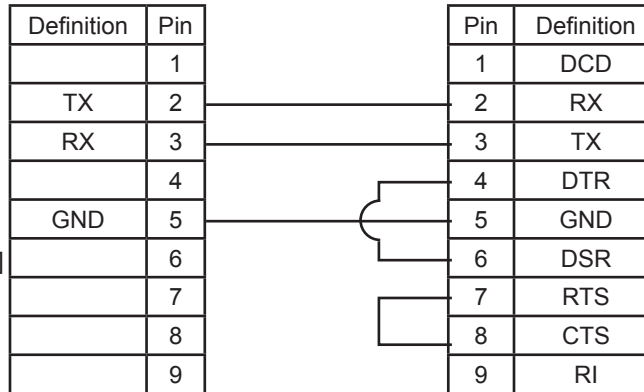

PC

RS-232 Pin Diagram



Leave a space between Command and Data. Terminate each command with a semi-colon “;” All codes are simple text (ASCLL)

If the command sent is correctly, the system will return “**SB5658K 00;**”

If the command sent is incorrect or out of range, the system will return “**SB5658K 01;**”

Example of the commanded string to select Inputs:

COMMANDS:

ITEM	COMMAND	DESCRIPTION
1	POWER	Set/Check the status of Power
2	EDID	SET/CHECK EDID

1. POWER

FUNCTION	COMMAND	RESPONSE	DESCRIPTION
Power OFF	Power 00;	SB5658K 00;	Power OFF
Power ON	Power 01;	SB5658K 00;	Power ON
Check the Status of Condition	Power ?;	Power 00;	Power OFF
		Power 01;	Power ON

2.EDID

FUNCTION	COMMAND	RESPONSE	DESCRIPTION
Select EDID	EDID [ii];	SB5658K 00;	“ii” is EDID Mode. 01-1080p 2CH 02-1080p Bitstream 03-4K2K Bitstream 04-Down-Scaling to 1080p 05-Up-Scaling to 4K2K
Check the Status of Condition	EDID ?;	EDID 01;	Set EDID to 1080p 2CH

The Shinybow switcher can be controlled via the RS-232 serial control port to allow for interfacing to a PC, or similar third party control system.

LIMITED WARRANTY

PLEASE READ THE FOLLOWING TERMS AND CONDITIONS CAREFULLY BEFORE USING THIS HARDWARE, COMPONENTS AND SOFTWARE PROVIDED BY, THROUGH OR UNDER SHINYBOWUSA, INC (COLLECTIVELY, THE "PRODUCT"). By using installing or using the Product, you unconditionally signify your agreement to these Terms and Conditions. If you do not agree to these Terms and Conditions, do not use the Product and return the Product to SHINYBOWUSA, Inc. at the return address set forth on the Product's packing label at your expense. SHINYBOWUSA, Inc. may modify these Terms and Conditions at anytime, without notice to you.

RESTRICTIONS ON USE OF THE PRODUCT

It is your responsibility to read and understand the installation and operation instructions, both verbal and in writing, provided to you with respect to the Product. You are authorized to use the Product solely in connection with such instructions. Any use of the Product not in accordance with such instructions shall void any warranty pertaining to the Product. Any and all damages that may occur in the use of the Product that is not strictly in accordance with such instructions shall be borne by you and you agree to indemnify and hold harmless SHINYBOWUSA, Inc. from and against any such damage.

The Product is protected by certain intellectual property rights owned by or licensed to SHINYBOWUSA. Any intellectual property rights pertaining to the Product are licensed to you by SHINYBOWUSA, Inc. and/or its affiliates, including any manufacturers or distributors of the Product (collectively, "SHINYBOWUSA") for your personal use only, provided that you do not change or delete any proprietary notices that may be provided with respect to the Product.

The Product is sold to you and any use of any associated intellectual property is deemed to be licensed to you by SHINYBOWUSA for your personal use only. SHINYBOWUSA does not transfer either the title or the intellectual property rights to the Product and SHINYBOWUSA retains full and complete title to the intellectual property rights therein. All trademarks and logos are owned by SHINYBOWUSA or its licensors and providers of the Product, and you may not copy or use them in any manner without the prior written consent of SHINYBOWUSA, which consent may be withheld at the sole discretion of SHINYBOWUSA.

The functionality and usability of the Product is controlled by SHINYBOWUSA, Inc. from its offices within the State of Texas, United States of America. SHINYBOWUSA makes no representation that materials pertaining to the Product are appropriate or available for use in other locations other than the shipping address you provided with respect thereto. You are advised that the Product may be subject to U.S. export controls.

DISCLAIMERS AND LIMITATION OF LIABILITY

SHINYBOWUSA may change or modify the Product at any time, from time to time.

THE PRODUCT IS PROVIDED "AS IS" AND WITHOUT WARRANTIES OF ANY KIND EITHER EXPRESS OR IMPLIED. SHINYBOWUSA DOES NOT WARRANT OR MAKE ANY REPRESENTATIONS REGARDING THE USE OR THE RESULTS OF THE USE OF THE PRODUCT'S CORRECTNESS, ACCURACY, RELIABILITY, OR OTHERWISE.

SHINYBOWUSA has no duty or policy to update any information or statements pertaining to the Product and, therefore, such information or statements should not be relied upon as being current as of the date you use the Product. Moreover, any portion of the materials pertaining to the Product may include technical inaccuracies or typographical errors. Changes may be made from time to time without notice with respect to the Product.

TO THE FULLEST EXTENT PERMISSIBLE PURSUANT TO APPLICABLE LAW, SHINYBOWUSA DISCLAIMS ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT. SHINYBOWUSA DOES NOT WARRANT THE ACCURACY, COMPLETENESS OR USEFULNESS OF ANY INFORMATION WITH RESPECT TO THE PRODUCT. SHINYBOWUSA DOES NOT WARRANT THAT THE FUNCTIONS PERTAINING TO THE PRODUCT WILL BE ERROR-FREE, THAT DEFECTS WITH RESPECT TO THE PRODUCT WILL BE CORRECTED, OR THAT THE MATERIALS PERTAINING THERETO ARE FREE OF DEFECTS OR OTHER HARMFUL COMPONENTS. SHINYBOWUSA WILL USE ITS REASONABLE EFFORTS TO CORRECT ANY DEFECTS IN THE PRODUCT UPON TIMELY WRITTEN NOTICE FROM YOU NOT TO EXCEED 10 BUSINESS DAYS AFTER RECEIPT BY YOU OF THE PRODUCT, BUT YOU (AND NOT SHINYBOWUSA) ASSUME THE ENTIRE COST OF ALL NECESSARY SERVICING, REPAIR AND CORRECTION THAT WAS CAUSED BY YOU UNLESS OTHERWISE AGREED TO IN A SEPARATE WRITING BY SHINYBOWUSA.

UNDER NO CIRCUMSTANCES, INCLUDING, BUT NOT LIMITED TO, NEGLIGENCE, SHALL SHINYBOWUSA BE LIABLE FOR ANY SPECIAL OR CONSEQUENTIAL DAMAGES THAT RESULT FROM THE USE OF, OR THE INABILITY TO USE THE PRODUCT IN ACCORDANCE WITH ITS SPECIFICATIONS, EVEN IF SHINYBOWUSA OR ITS REPRESENTATIVES HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. IN NO EVENT SHALL SHINYBOWUSA'S TOTAL LIABILITY TO YOU FROM ALL DAMAGES, LOSSES, AND CAUSES OF ACTION (WHETHER IN CONTRACT, OR OTHERWISE) EXCEED THE AMOUNT YOU PAID TO SHINYBOWUSA, IF ANY, FOR THE PRODUCT.

END OF DOCUMENT

122 Rose Ln. Suite 303 | Frisco, Texas 75034

1-877-SHINY-USA

1-877-744-6987

1-972-377-2508

sales@shinybowusa.com

www.shinybowusa.com

SHINYBOW™ USA
MULTIMEDIA AUDIO AND VISUAL