

User Manual

2U Multi-Display Console Drawer



4K

UHD

MRK-K17-2L

MRK-K17-3

MRK-K17-2R

1080p

60 Hz

MRK-F17-2L

MRK-F17-3

MRK-F17-2R

1920

1200

MRK-X17-2L

MRK-X17-3

MRK-X17-2R

1280

1024

MRK-19-2L

MRK-19-3

MRK-19-2R

Designed and manufactured by Austin Hughes

Legal Information

First English printing, August 2026

Information in this document has been carefully checked for accuracy; however, no guarantee is given to the correctness of the contents. The information in this document is subject to change without notice. We are not liable for any injury or loss that results from the use of this equipment.

Safety Instructions

Please read all of these instructions carefully before you use the device. Save this manual for future reference.

- Unplug equipment before cleaning. Don't use liquid or spray detergent; use a moist cloth.
- Keep equipment away from excessive humidity and heat. Preferably, keep it in an air-conditioned environment with temperatures not exceeding 40° Celsius (104° Fahrenheit).
- When installing, place the equipment on a sturdy, level surface to prevent it from accidentally falling and causing damage to other equipment or injury to persons nearby.
- When the equipment is in an open position, do not cover, block or in any way obstruct the gap between it and the power supply. Proper air convection is necessary to keep it from overheating.
- Arrange the equipment's power cord in such a way that others won't trip or fall over it.
- If you are using a power cord that didn't ship with the equipment, ensure that it is rated for the voltage and current labelled on the equipment's electrical ratings label. The voltage rating on the cord should be higher than the one listed on the equipment's ratings label.
- Observe all precautions and warnings attached to the equipment.
- If you don't intend on using the equipment for a long time, disconnect it from the power outlet to prevent being damaged by transient over-voltage.
- Keep all liquids away from the equipment to minimize the risk of accidental spillage. Liquid spilled on to the power supply or on other hardware may cause damage, fire or electrical shock.
- Only qualified service personnel should open the chassis. Opening it yourself could damage the equipment and invalidate its warranty.
- If any part of the equipment becomes damaged or stops functioning, have it checked by qualified service personnel.

What the warranty does not cover

- Any product, on which the serial number has been defaced, modified or removed.
- Damage, deterioration or malfunction resulting from:
 - ☐ Accident, misuse, neglect, fire, water, lightning, or other acts of nature, unauthorized product modification, or failure to follow instructions supplied with the product.
 - ☐ Repair or attempted repair by anyone not authorized by us.
 - ☐ Any damage of the product due to shipment.
 - ☐ Removal or installation of the product.
 - ☐ Causes external to the product, such as electric power fluctuation or failure.
 - ☐ Use of supplies or parts not meeting our specifications.
 - ☐ Normal wear and tear.
 - ☐ Any other causes which does not relate to a product defect.
- Removal, installation, and set-up service charges.

Regulatory Notices Federal Communications Commission (FCC)

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC rules. These limits are designed to provide reasonable protection against harmful interference in business, industrial and commercial environments.

Any changes or modifications made to this equipment may void the user's authority to operate this equipment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications.

However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Re-position or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.

Contents

< Part. 1 > MRK

1.1	Package Content	P.1
1.2	Structure Diagram & Dimension	P.1
1.3	Installation	P.4
1.4	Connection	P.8

< Part. 2 > Specifications / OSD

2.1	Product Specifications	P.12
2.2	Video connectivity	P.18
2.3	Keyboard / Mouse Specifications	P.19
2.4	On-screen Display Operation (OSD)	P.23

< Part. 3 > Options

3.1	3G / HD / SD-SDI Broadcast-grade input	P.27
3.2	Projected Capacitive (10-point touch) / Resistive (1-point touch)	P.28
3.3	DC Power : 12V / 24V / 48V / 125V / 250V	P.30
3.4	USB Keyboard & Mouse Selector	P.31

Before Installation

- It is very important to mount the equipment in a suitable cabinet or on a stable surface.
- Make sure the place has a good ventilation, is out of direct sunlight, away from sources of excessive dust, dirt, heat, water, moisture and vibration.

Unpacking

The equipment comes with the standard parts shown in package content. Check and make sure they are included and in good condition. If anything is missing, or damaged, contact the supplier immediately.

How To Clean Your LCD Monitor



Caution :

- To avoid the risk of electric shock, make sure your hands are dry before unplugging your monitor from or plugging your monitor into an electrical outlet.
- When you clean your monitor, do not press down on the LCD screen. Pressing down on the screen can scratch or damage your display. Pressure damage is not covered under warranty.
- Use only cleansers made specifically for cleaning monitors and monitor screens. Cleansers not made to clean monitors and monitor screens can scratch the LCD display or strip off the finish.
- Do not spray any kind of liquid directly onto the screen or case of your monitor. Spraying liquids directly onto the screen or case can cause damage which is not covered under warranty.
- Do not use paper towels or abrasive pads to clean your monitor. Using an abrasive pad or any wood based paper product such as paper towels can scratch your LCD screen.

Cleaning Your Monitor

To clean your LCD safely, please follow these steps :

- ① Disconnect the power cord.
- ② Gently wipe the surface using a clean, dry microfiber cloth. Use as little pressure as possible.

Cleaning Tough Marks and Smudges

To remove tough marks and smudges, please follow these steps :

- ① Disconnect the power cord.
- ② Spray a small amount of non-abrasive cleanser on a microfiber cloth.



Caution : Do not spray or apply any liquids directly onto the monitor. Always apply the solution to your microfiber cloth first, not directly on the parts you are cleaning.

- ③ Gently wipe the surface. Use as little pressure as possible.
- ④ Wait until your monitor is completely dry before plugging it in and powering it up.

< Part 1 >

< 1.1 > Package Content



MRK-K17 unit X 1

- 6ft DP cable X 2 or 3
- USB (A) to (A) cable X 2
- Power adapter & Power cord X 1
- M6 screw, cage nut & cup washer X 8

MRK-F17 /


MRK-X17 / MRK-19 unit X 1

- 6ft HDMI cable X 2 or 3
- USB keyboard cable X 2
- Power adapter & Power cord X 1
- M6 screw, cage nut & cup washer X 8



The above package content is only for the single console models.
It varies with options such as SDI & DC power.

< 1.2 > Structure Diagram

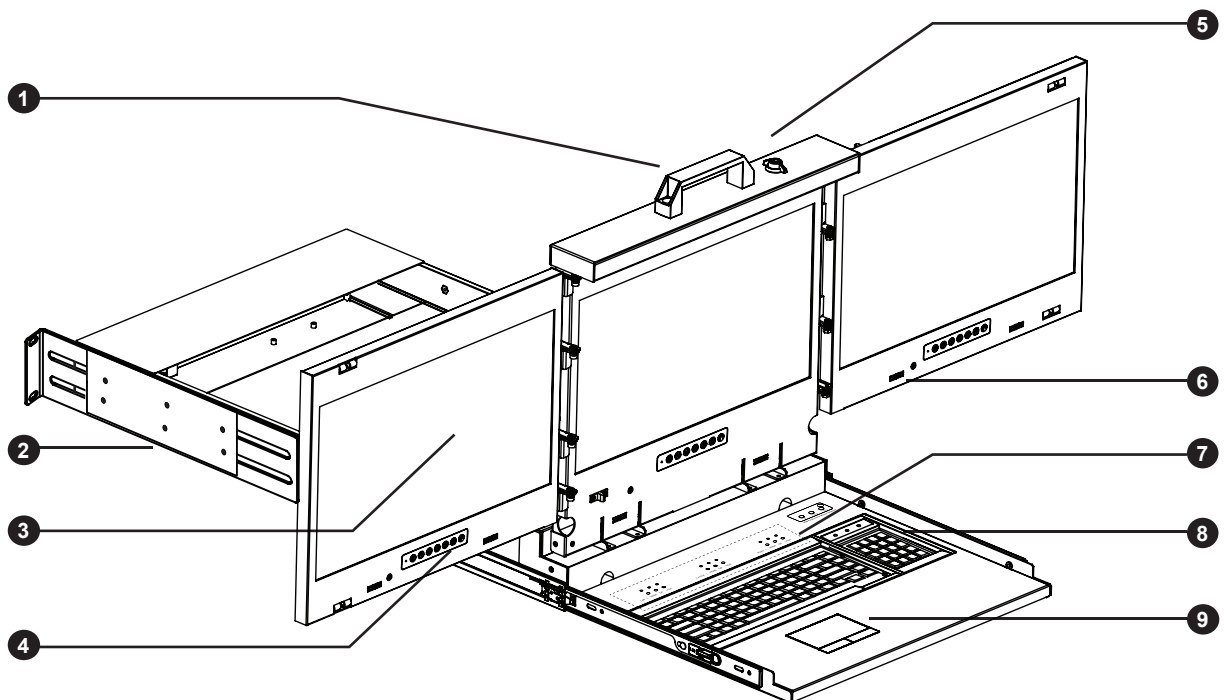

① Carry handle

② Installation Slides

③ LCD module kit

④ LCD membrane

⑤ Keylock

⑥ Audio speaker (for SDI option)

⑦ Video selection button

⑧ Keyboard interchangeable module kit


⑨ Mouse interchangeable module kit



< 1.2 > MRK-K17 / MRK-F17 / MRK-X17 Dimension

1mm = 0.03937 inch

Front View

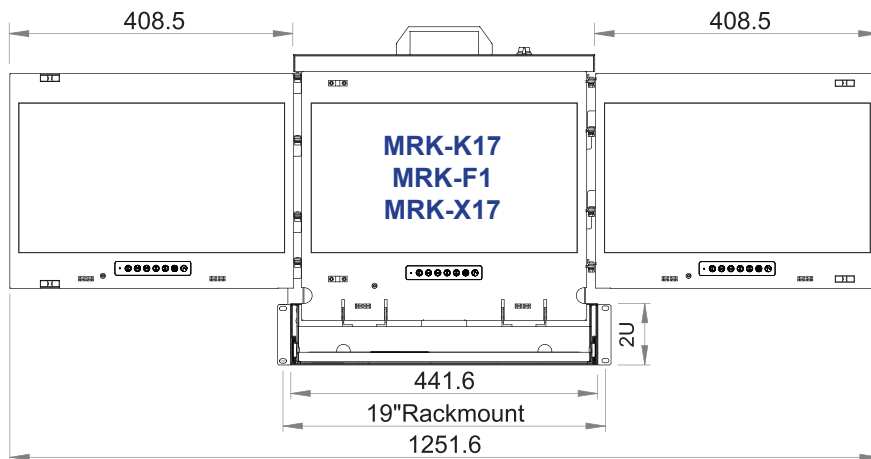

Triple display




Dual display (LH mounted)




Dual display (RH mounted)




Rear View

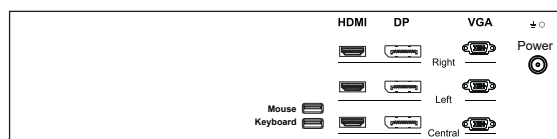

Side View

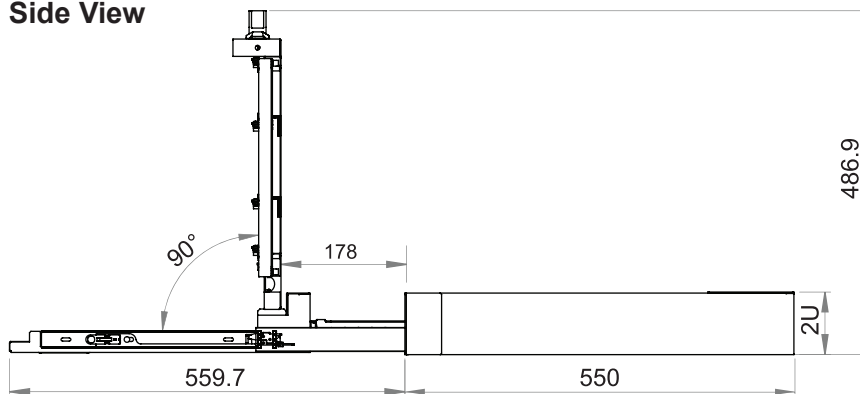

Top View

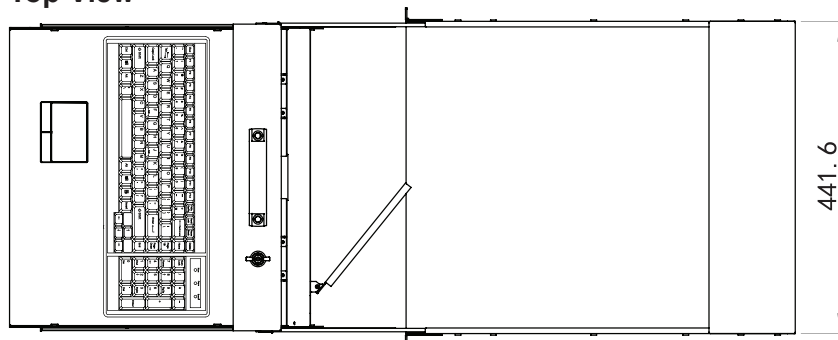

Model		Display	Product Dimension (W x D x H)	Packing Dimension (W x D x H)	Net Weight	Gross Weight
MRK-K17 MRK-F17 MRK-X17	-3	Triple	441.6 x 550 x 88 mm 17.4 x 21.7 x 3.5 inch	580 x 683 x 197 mm 22.8 x 26.9 x 7.8 inch	25.7 kg 56.5 lb	31.1 kg 68.4 lb
	-2L	Dual LH mounted	441.6 x 550 x 88 mm	580 x 683 x 197 mm	21 kg	26 kg
	-2R	Dual RH mounted	17.4 x 21.7 x 3.5 inch	22.8 x 26.9 x 7.8 inch	46.2 lb	57.2 lb




The weight is only for the single console models. It varies with accessories & options .

< 1.2 > MRK-19 Dimension

1mm = 0.03937 inch

Front View

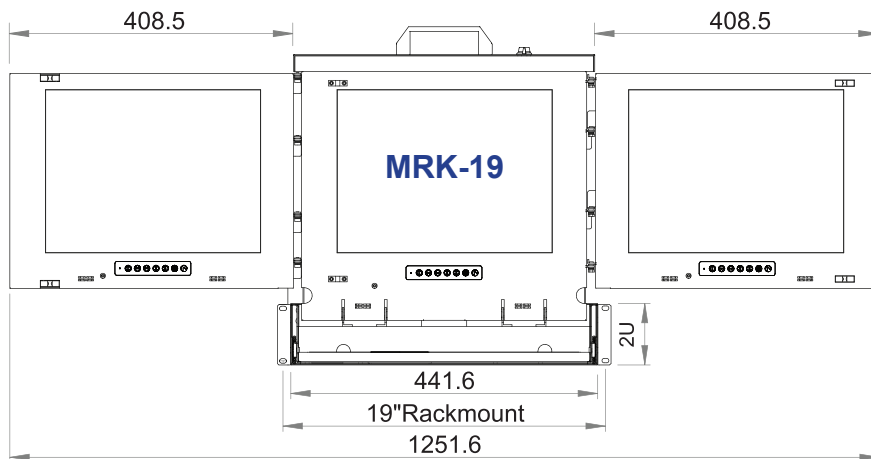

Triple display




Dual display (LH mounted)




Dual display (RH mounted)




Rear View

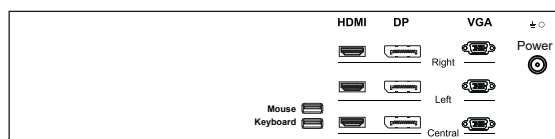

Side View

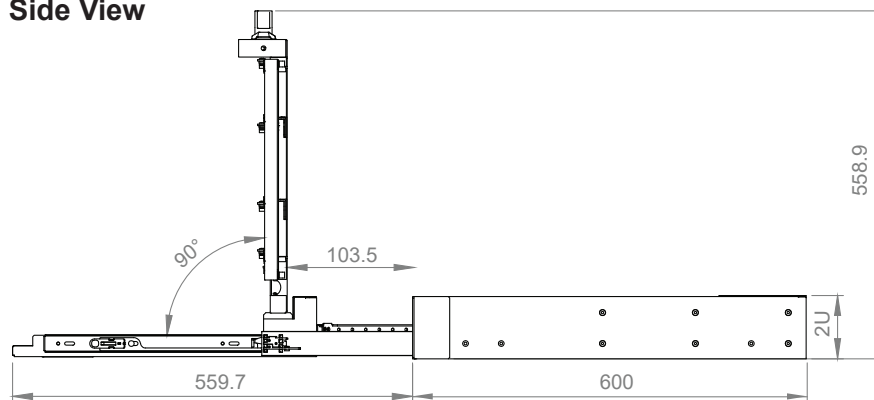

Top View

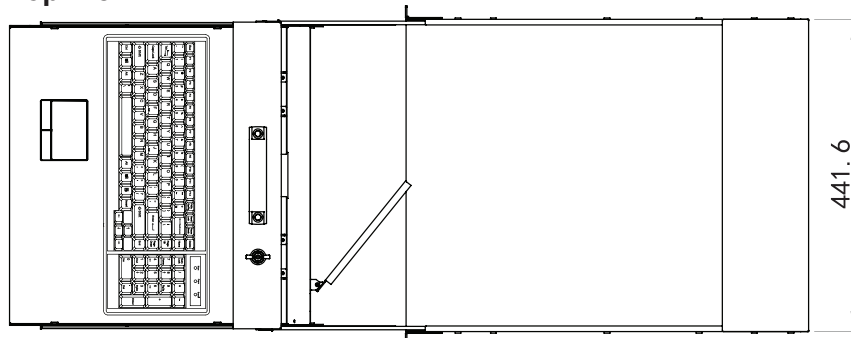

Model	Display	Product Dimension (W x D x H)	Packing Dimension (W x D x H)	Net Weight	Gross Weight
MRK-19	-3 Triple	441.6 x 600 x 88 mm 17.4 x 23.6 x 3.5 inch	581 x 753 x 216 mm 22.9 x 29.6 x 8.5 inch	26.7 kg 58.7 lb	32.1 kg 70.6 lb
	-2L Dual LH mounted	441.6 x 600 x 88 mm 17.4 x 23.6 x 3.5 inch	581 x 753 x 216 mm 22.9 x 29.6 x 8.5 inch	22 kg 48.4 lb	27 kg 59.4 lb
	-2R Dual RH mounted	441.6 x 600 x 88 mm 17.4 x 23.6 x 3.5 inch	581 x 753 x 216 mm 22.9 x 29.6 x 8.5 inch	22 kg 48.4 lb	27 kg 59.4 lb




The weight is only for the single console models. It varies with accessories & options .

< 1.3 > Installation - How to install Installation Slides


Step 1

- The left and right rear mounting brackets are attached to the Multi-display console drawer.

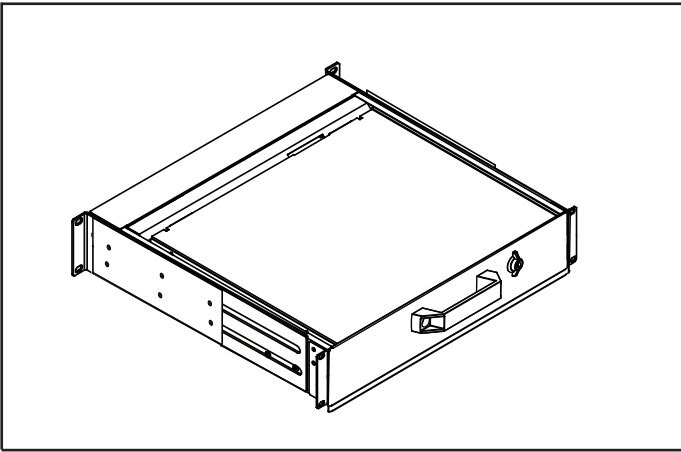

Step 2

- Measure the depth of the front and rear mounting rails.
- Align each rear mounting bracket to a suitable length.
- Mounting distance : 550 - 790 mm

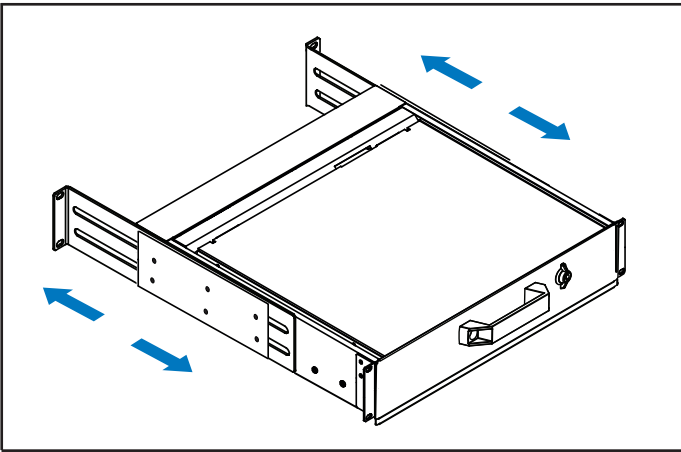


Step 3

Complete the installation

- Fix the Multi-display console drawer into the rack.

 **M6 screw, cage nut & cup washer x 8 are provided.**

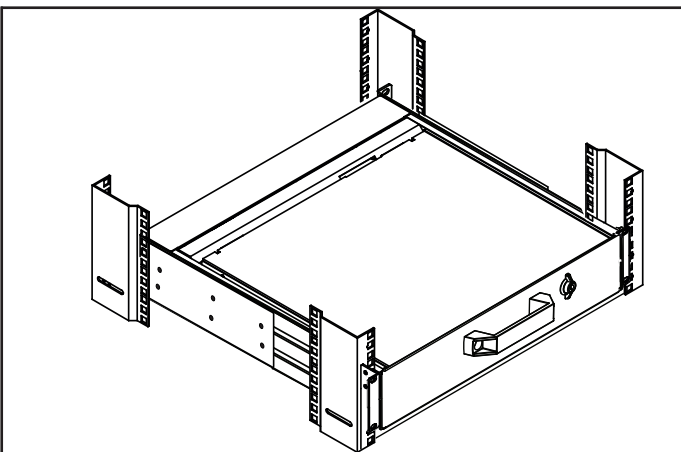

< 1.3 > Installation - How to Use the **Multi-Display** Drawer



Step 1

- Unlock the key cylinder to 3 o'clock direction.



Step 2

- Hold the handle and slide out the drawer.



Step 3

- Flip up the LCD to a suitable angle.



Step 4

- Open the **Left** / **Right** display.

< 1.3 > Installation - How to Use the

Multi-Display

Drawer

Step 5

- Operate the multi-display drawer.



Step 6

- Close the **Left** / **Right** display.
- Flip down the LCD completely.



Step 7

- Must completely extend the drawer before returning it to the park position.
- Then pull and hold both side release buttons when pushing the drawer back to the rack.




**The above steps are necessary.
Failure to complete these will cause damage.**

Step 8


- Return the multi-display drawer to park position.




< 1.3 > Installation - How to Use the Slides

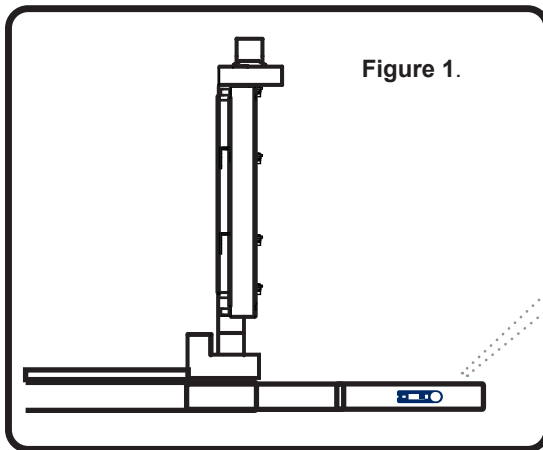

- A purple release button is located on the front of the slide. (shown in **Figure 1**).

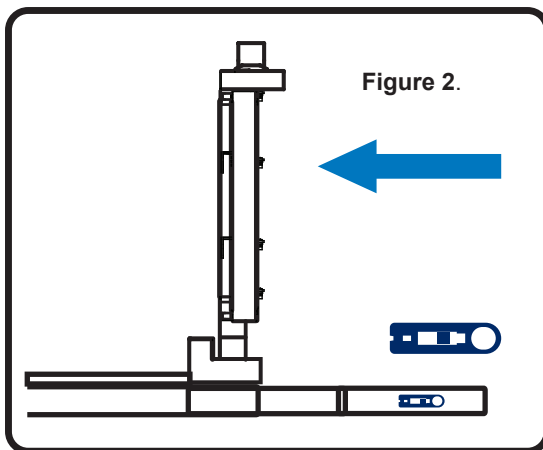


- Pull and hold both side release buttons when pushing the Multi display console drawer back to the rack. (shown in **Figure 2**).

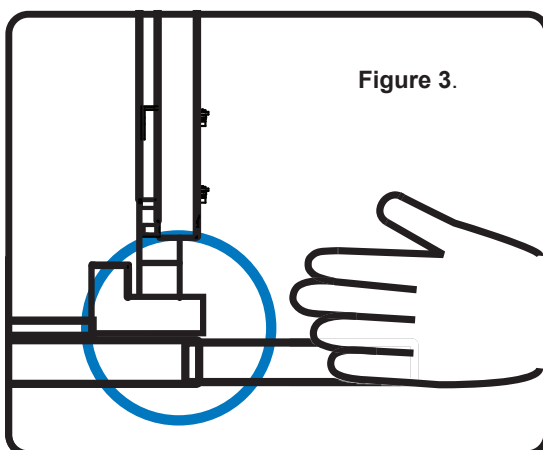

- ⚠ **Caution** : Keep your fingers away from the slide stop. (shown in **Figure 3**).

< 1.4 > Connection to DP Server

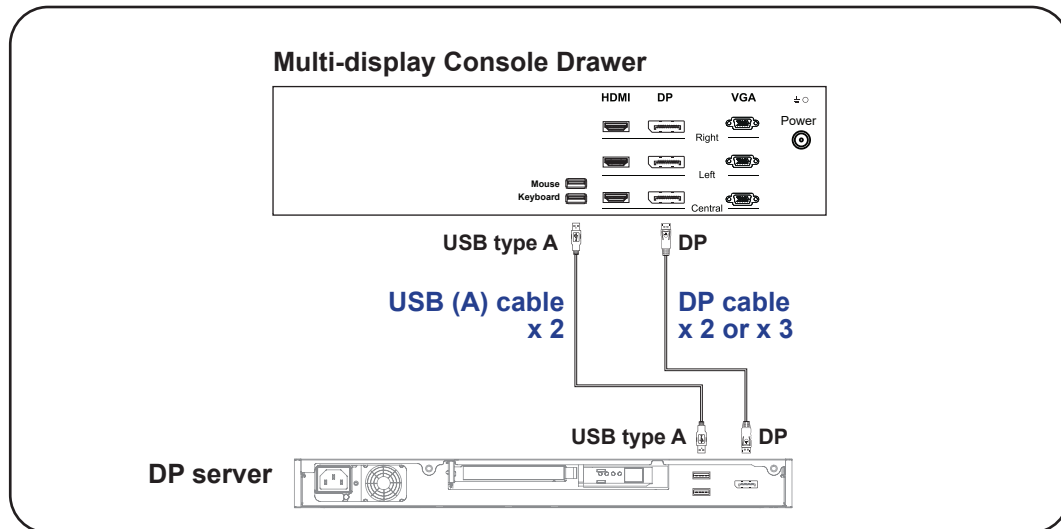


* DP cable x 2 for dual display and USB (A) cable x 2



Caution : The LCD console drawer is hot-pluggable, but components of connected devices, such as the servers and KVM switch, may not be hot-pluggable. Plugging and unplugging cables while servers and KVM are powered on may cause irreversible damage to the servers, KVM and LCD console drawer. Before attempting to connect anything to the LCD console drawer, we suggest turning off the power to all devices. Apply power to connected devices again only after the LCD console drawer is receiving power. The company is not responsible for damage caused in this way.

< 1.4 > Connection to **HDMI Server**

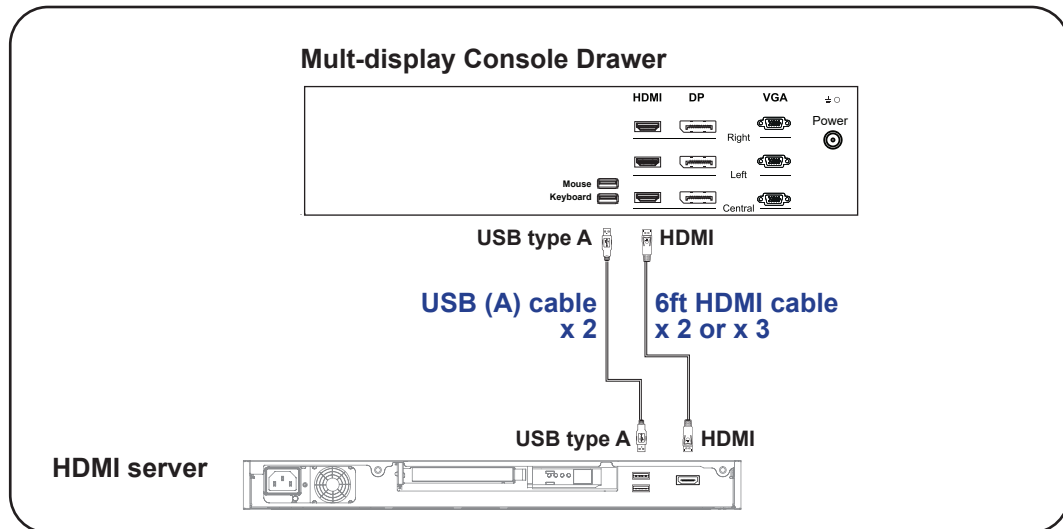


* HDMI cable x 2 for dual display and USB (A) cable x 2



Caution : The LCD console drawer is hot-pluggable, but components of connected devices, such as the servers and KVM switch, may not be hot-pluggable. Plugging and unplugging cables while servers and KVM are powered on may cause irreversible damage to the servers, KVM and LCD console drawer. Before attempting to connect anything to the LCD console drawer, we suggest turning off the power to all devices. Apply power to connected devices again only after the LCD console drawer is receiving power. The company is not responsible for damage caused in this way.

< 1.4 > Connection to **USB Server**

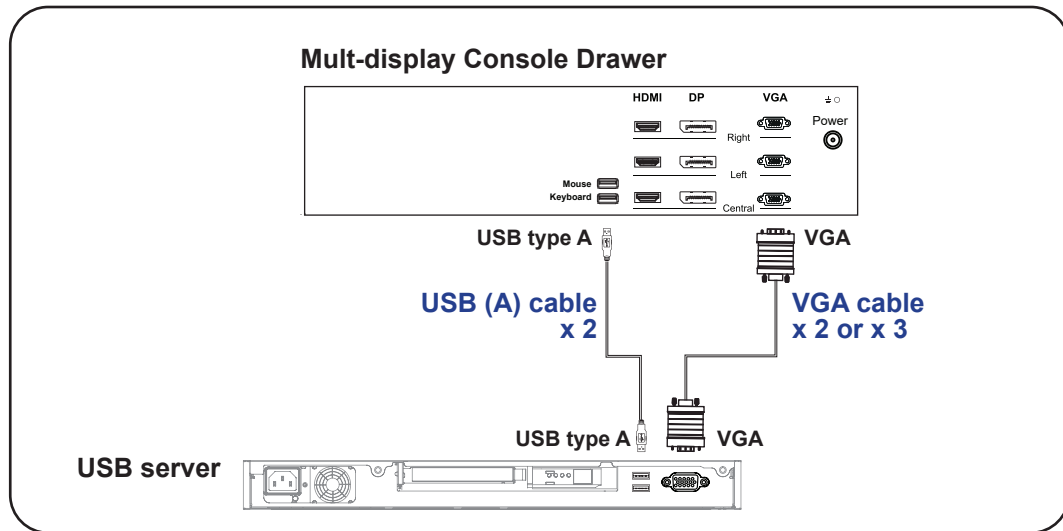

* **VGA cable x 2 for dual display and USB (A) cable x 2**



Caution : The LCD console drawer is hot-pluggable, but components of connected devices, such as the servers and KVM switch, may not be hot-pluggable. Plugging and unplugging cables while servers and KVM are powered on may cause irreversible damage to the servers, KVM and LCD console drawer. Before attempting to connect anything to the LCD console drawer, we suggest turning off the power to all devices. Apply power to connected devices again only after the LCD console drawer is receiving power. The company is not responsible for damage caused in this way.

Intentionally Left Blank

< Part 2 >

< 2.1 > Product Specifications - MRK-K17

LCD Panel	MRK-K17		
	Native Resolution	3840 x 2160@60Hz	
	Panel Size (diagonal)	17.3-inch TFT color LCD	
	Brightness (cd/m ²)	400	
	Contrast Ratio (typ.)	1000:1	
	Colors	16.7 M, 8-bit	
	Viewing Angle (L/R/U/D)	89/89/89/89	
	Response Time (ms)	Max. 16	
	Dot pitch (mm)	0.0995	
	Display Area (mm)	382.12H x 214.94V	
	Surface treatment	Anti-glare	
	Surface hardness	3H	
	Backlight Type	LED	
	MTBF (hrs)	50,000	

Video Connectivity	Digital	HDMI	HDMI 2.0, HDCP 2.2
		Display Port	DP 1.2 / HDCP 1.3
	Analog	VGA	Analog 0.7Vp-p

Power	Power Supply	Range	Auto-sensing 100 to 240VAC, 50 / 60Hz
	Power Consumption	Screen ON	Max. 35W
		Power saving mode	Max. 2W
		Power button OFF	Max. 1W

Compliance	EMC	FCC & CE
	Safety	CE / LVD & UKCA
	Environmental	RoHS3 & REACH / WEEE

Environmental Conditions	Operating	Temperature	0 to 55°C degree
		Humidity	10~90%, non-condensing
		Altitude	16,000 ft
	Storage / Non-operating	Temperature	-20 to 60°C degree
		Humidity	5~90%, non-condensing
		Altitude	40,000 ft
		Shock	10G acceleration (11ms duration)
		Vibration	10~300Hz 0.5G RMS random

< 2.1 > Product Specifications - MRK-K17

Physical Specification	Product (W x D x H)		mm	441.6 x 550 x 88
			inch	17.4 x 21.7 x 3.5
	Packing (W x D x H)		mm	580 x 683 x 197
			inch	22.8 x 26.9 x 7.8
	Weight	Net	Triple display	25.7 kg / 56.5 lb
			Dual display	21 kg / 46.2 lb
		Gross	Triple display	31.1 kg / 68.4 lb
			Dual display	26 kg / 57.2 lb

* All dimensions stated are subject to change if options are selected / integrated to base model part codes

Applicable Format	Display Port Input	PC Signal	3840 x 2160 x 60Hz
			2560 x 1440 x 60Hz
			1920 x 1080 x 60Hz
			1600 x 1200 x 60Hz
			1360 x 768 x 60Hz
			1280 x 1024 x 60 / 75Hz
			1280 x 768 x 60Hz
			1024 x 768 x 60 / 70 / 75Hz
			800 x 600 x 60 / 72 / 75Hz
			720 x 400 x 70Hz
			640 x 480 x 60 / 72 / 75Hz
		Audio Signal	2ch Linear PCM
	HDMI Input	HDMI 2.0	3840 x 2160 x 60Hz
			2560 x 1440 x 60Hz
		HDMI 2.0 / 1.4	3840 x 2160 x 30Hz
			2560 x 1440 x 60Hz
			1920 x 1080 x 50 / 60Hz (1080p)
			1920 x 1080 x 25 / 30Hz (1080i)
			1280 x 720 x 50 / 60Hz (720p)
			720 x 480 x 50 / 60Hz (576p / 480p)
		Audio Signal	2ch Linear PCM

< 2.1 > Product Specifications - MRK-F17

LCD Panel	MRK-F17	
	Native Resolution	1920 x 1080
	Panel Size (diagonal)	17.3"
	Standard Brightness (cd/m ²)	300
	High Brightness (cd/m ²) - Option	1000
	Contrast Ratio (typ.)	1000:1
	Colors	16.7 M, 8-bit
	Viewing Angle (L/R/U/D)	85/85/85/85
	Response Time (ms)	5.5
	Dot pitch (mm)	0.1989
	Display Area (mm)	381.888H x 214.812V
	Surface treatment	Anti-glare, Hard-coating
	Surface hardness	3H
	Backlight Type	LED
	MTBF (hrs)	50,000

Video Connectivity	Digital	HDMI	HDMI 1.4, HDCP 1.4
		Display Port	DP 1.2 / HDCP 1.3
	Analog	VGA	Analog 0.7Vp-p

Power	Power Supply	Range	Auto-sensing 100 to 240VAC, 50 / 60Hz
	Power Consumption	Screen ON	Max. 14W
		Power saving mode	Max. 2W
		Power button OFF	Max. 1W

Compliance	EMC	FCC & CE
	Safety	CE / LVD & UKCA
	Environmental	RoHS3 & REACH / WEEE

Environmental Conditions	Operating	Temperature	0 to 55°C degree
		Humidity	10~90%, non-condensing
		Altitude	16,000 ft
	Storage / Non-operating	Temperature	-20 to 60°C degree
		Humidity	5~90%, non-condensing
		Altitude	40,000 ft
		Shock	10G acceleration (11ms duration)
		Vibration	10~300Hz 0.5G RMS random

< 2.1 > Product Specifications - MRK-F17

Physical Specification	Product	mm	441.6 x 550 x 88
	(W x D x H)	inch	17.4 x 21.7 x 3.5
	Packing	mm	580 x 683 x 197
	(W x D x H)	inch	22.8 x 26.9 x 7.8
	Net Weight	Triple display	25.7 kg / 56.5 lb
		Dual display	21 kg / 46.2 lb
Gross Weight		Triple display	31.1 kg / 68.4 lb
		Dual display	26 kg / 57.2 lb

* All dimensions stated are subject to change if options are selected / integrated to base model part codes

Applicable Format	DVI-D / VGA Input	PC Signal	1920 x 1080 x 60Hz
			1680 x 1050 x 60Hz
			1440 x 900 x 60Hz
			1360 x 768 x 60Hz
			1280 x 1024 x 60Hz
			1280 x 768 x 60Hz
			1280 x 720 x 60Hz
			1152 x 864 x 60Hz
			1024 x 768 x 60Hz
			800 x 600 x 60Hz
			640 x 480 x 60Hz
		Audio Signal	2ch Linear PCM
	HDMI Input	PC Signal	Same as VGA
		HDMI 1.4	1920 x 1080 x 50 / 60Hz (1080p)
			1920 x 1080 x 25 / 30Hz (1080i)
			1280 x 720 x 50 / 60Hz (720p)
			720 x 480 x 50 / 60Hz (576p / 480p)
		Audio Signal	2ch Linear PCM
	Display port Input	PC Signal	1920 x 1080 x 60Hz
			1680 x 1050 x 60Hz
			1440 x 900 x 60Hz
			1360 x 768 x 60Hz
			1280 x 1024 x 60Hz
			1280 x 768 x 60Hz
			1280 x 720 x 60Hz
			1152 x 864 x 60Hz
			1024 x 768 x 60Hz
			800 x 600 x 60Hz
			640 x 480 x 60Hz
		Audio Signal	2ch Linear PCM

< 2.1 > Product Specifications - MRK-X17 / MRK-19

LCD Panel		MRK-X17	MRK-19
	Native Resolution	1920 x 1200	1280 x 1024
	Panel Size (diagonal)	16.2"	19"
	Standard Brightness (cd/m ²)	300	250
	High Brightness (cd/m ²) - Option	/	1000
	Contrast Ratio (typ.)	600:1	1000:1
	Colors	16.7 M, 8-bit	16.7 M
	Viewing Angle (L/R/U/D)	89/89/89/89	85/85/80/80
	Response Time (ms)	30	5
	Dot pitch (mm)	0.191	0.294
	Display Area (mm)	383.8H x 214.9V	337.92H x 270.33V
	Surface treatment	Anti-glare, Hard-coating	Haze 25%, Hard-coating
	Surface hardness	3H	3H
	Backlight Type	LED	LED
	MTBF (hrs)	50,000	30,000

Video Connectivity	Digital	HDMI	HDMI 1.4, HDCP 1.4
		Display Port	DP 1.2 / HDCP 1.3
	Analog	VGA	Analog 0.7Vp-p

Power	Power Supply	Range	Auto-sensing 100 to 240VAC, 50 / 60Hz	
	Power Consumption	Screen ON	Max. 25W	Max. 22W
		Power saving mode	Max. 2W	Max. 2W
		Power button OFF	Max. 1W	Max. 1W

Compliance	EMC	FCC & CE
	Safety	CE / LVD & UKCA
	Environmental	RoHS3 & REACH / WEEE

Environmental Conditions	Operating	Temperature	0 to 55°C degree
		Humidity	10~90%, non-condensing
		Altitude	16,000 ft
	Storage / Non-operating	Temperature	-20 to 60°C degree
		Humidity	5~90%, non-condensing
		Altitude	40,000 ft
		Shock	10G acceleration (11ms duration)
		Vibration	10~300Hz 0.5G RMS random


< 2.1 > Product Specifications - MRK-X17 / MRK-19

Physical Specification	Product (W x D x H)	MRK-X17	mm	441.6 x 550 x 88
			inch	17.4 x 21.7 x 3.5
		MRK-19	mm	441.6 x 600 x 88
			inch	17.4 x 23.6 x 7.8
	Packing (W x D x H)	MRK-X17	mm	580 x 683 x 197
			inch	22.8 x 26.9 x 7.8
		MRK-19	mm	581 x 753 x 216
			inch	22.9 x 29.6 x 8.5
Net Weight	MRK-X17	Triple display		25.7 kg / 56.5 lb
		Dual display		21 kg / 46.2 lb
	MRK-19	Triple display		26.7 kg / 58.7 lb
		Dual display		22 kg / 48.4 lb
Gross Weight	MRK-X17	Triple display		31.1 kg / 68.4 lb
		Dual display		26 kg / 57.2 lb
	MRK-19	Triple display		32.1 kg / 70.6 lb
		Dual display		27 kg / 59.4 lb

* All dimensions stated are subject to change if options are selected / integrated to base model part codes

Applicable Format	DVI-D / VGA Input	PC Signal	1920 x 1200 x 60Hz (MRK-X17 only)
			1400 x 1050 x 60Hz (MRK-X17 only)
			1440 x 900 x 60Hz (MRK-X17 only)
			1360 x 768 x 60Hz (MRK-X17 only)
			1280 x 1024 x 60 / 75Hz
			1280 x 960 x 60Hz
			1280 x 768 x 60 / 75Hz
			1152 x 864 x 75Hz
			1024 x 768 x 60 / 70 / 75Hz
			848 x 480 x 60Hz
			800 x 600 x 60 / 72 / 75Hz
			720 x 400 x 70Hz
			640 x 480 x 60 / 72 / 75Hz
			640 x 400 x 70Hz
			640 x 350 x 70Hz
	HDMI Input	Audio Signal	2ch Linear PCM
		PC Signal	Same as VGA
			1920 x 1080 x 50 / 60Hz (1080p) (MRK-X17 only)
			1920 x 1080 x 25 / 30Hz (1080i) (MRK-X17 only)
			1280 x 720 x 50 / 60Hz (720p)
			720 x 480 x 50 / 60Hz (576p / 480p)
		Audio Signal	2ch Linear PCM

< 2.2 > Video connectivity

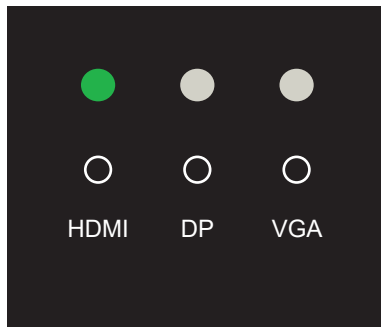

LED light

- No light = OFF
- Green = ON / Connected
- Red = Disconnected





..... Video selection button

- HDMI LED will be ON after power ON (Default video input = HDMI)
- Select VGA or DP video input by pressing the desired video selection button
- LED light will be **Green** if the video signal is selected ; others will be OFF
- LED light will be **Red** if no video signal input
- To auto adjust under VGA mode, by pressing the VGA button 3 ~ 5 seconds to confirm

< 2.3 > Standard Keyboard / Mouse Specifications

Ge G keyboard integrated with touchpad

Gb G keyboard integrated with trackball

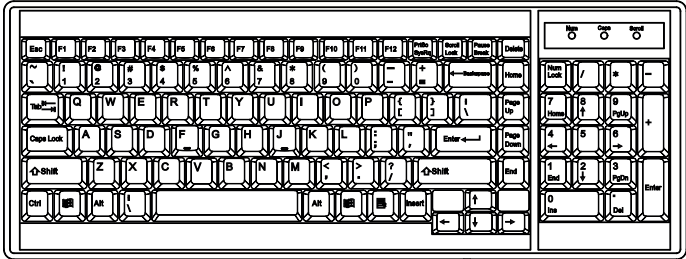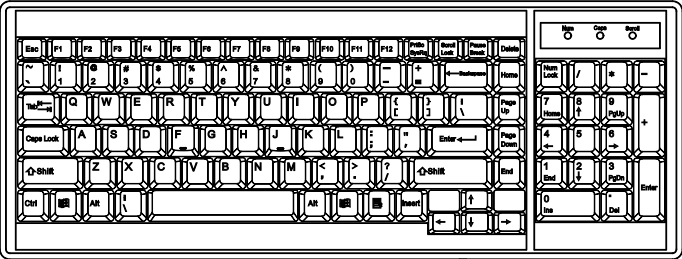

Key force	55 ± 5g
Travelling distance	3 ± 0.3mm
Switch life	> 10 million life cycle time
OS support	Windows / Linux / Unix / Mac OS

Supporting layouts

America



United States

EMEA



United Kingdom



Germany



France



Spain



Italy

Asia





Japan




Korea

< 2.3 > MAC Keyboard / Mouse Options

Me MAC keyboard integrated with touchpad

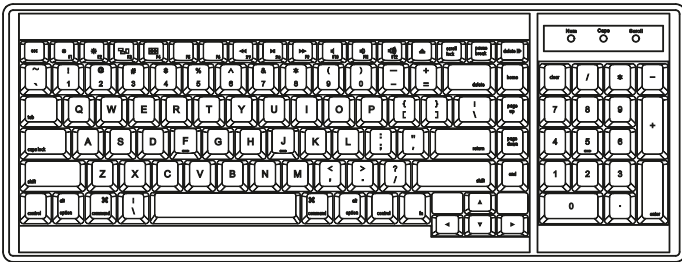

Mb MAC keyboard integrated with trackball

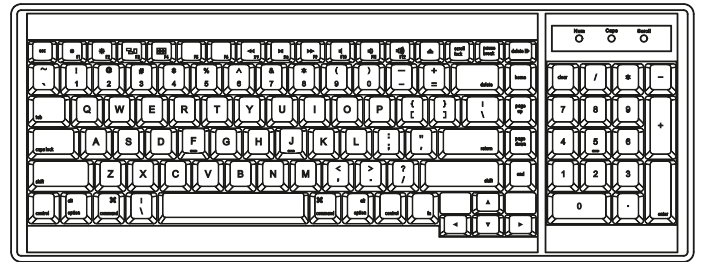

Supporting layouts


America




United States

How to Use "MAC" Keyboard


Keyboard Features




F1
Decrease display brightness




F9
Fast-forward



F2
Increase display brightness



F10
Mute sound



F3
Mission control
* Only works with OS X Lion
default Keyboard Shortcuts.



F11
Decrease volume



F4
Dashboard



F12
Increase volume



F7
Rewind



Eject disc



F8
Play / Pause



Command

< 2.3 > SUN Keyboard / Mouse Options

Se S keyboard integrated with touchpad



Sb S keyboard integrated with trackball




S keyboard integrated with touchpad / trackball




- Incorporates SUN keys, including Stop, Cut, Paste, Compose, Copy and Help
- 104 key notepad keyboard with full numerical pad and SUN function
- USB interface
- US layout only

How to Use "S" Keyboard

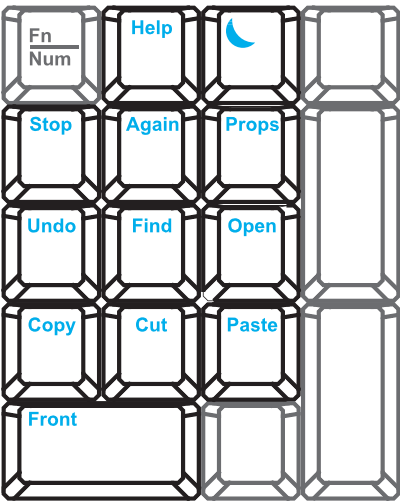

Num LED in Off mode

Key pad behaves as a SUN Solar system administration command mode

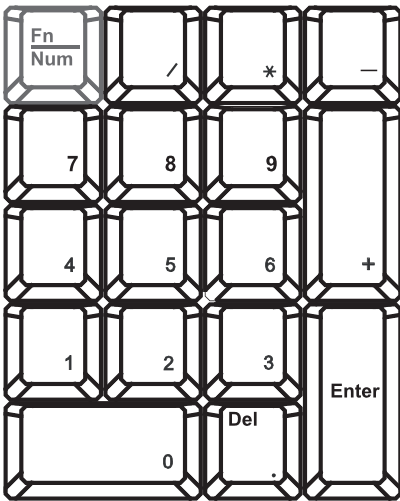


Num LED in Green mode


Key pad behaves as a normal key pad mode

Audio / Display Keys

* Please ask your supplier for full details



F9
Audio : Mute
Display : Degauss



F11
Audio : Decrease volume
Display : Decrease contrast




F12
Audio : Increase volume
Display : Increase contrast

Intentionally Left Blank

< 2.4 > On-screen Display Operation (OSD)

- Power light
- Green = On
- Orange = Power saving



Membrane Switch	Function
	Power on / off LCD
	Display the OSD menu
	Scrolls through menu options and adjusts the displayed control (To auto adjustment by pressing the button  for 5 seconds)
	Exit the OSD screen Toggle analog, digital & video connection (DVI-D and video options only)

Select another video input (only available for models with multiple video input) :

- (a) Press the button  to call up the on-screen video mode on top right corner.
- (b) Use up/down arrow   to the select the video input
- (c) Press the button  to confirm the selection

< 2.4 > On-screen Display Operation (OSD)


① Picture

Brightness : Adjust the screen brightness

Contrast : Adjust the difference between the image background (black level) and the foreground (white level)

Black level : Adjust background black level of the screen

Eco : Screen in power saving mode

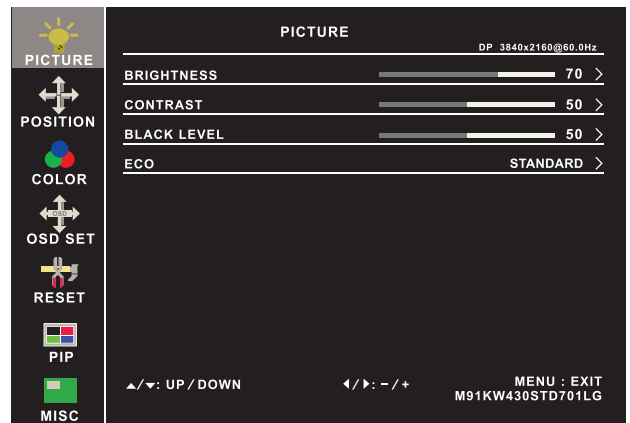


② Position

Picture size : Adjust the image size

- Full Screen / 4:3 / 5:4 / Pixel to Pixel

DP version : Select the DP version

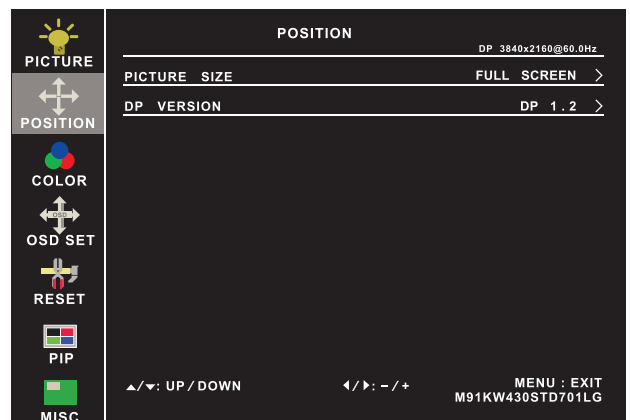

③ Color

Color temperature : User / Warm / Cool / 5400k mode and Red / Green / Blue color balance


Sharpness : Adjust the image from weak to sharp

Hue : Adjust the screen hue value

Saturation : Adjust the saturation of the image color

Dynamic

luminous control : Control the dynamic brightness

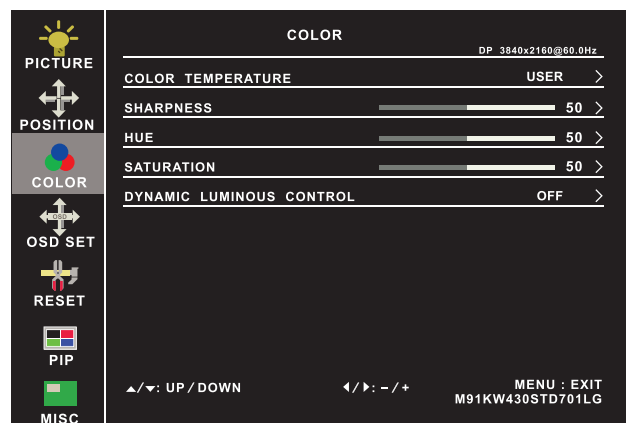

④ OSD Set

Language : Select the language in which the OSD menu is displayed - English

OSD H-Position : Align the screen image left or right


OSD V-Position : Align the screen image up or down

OSD time out : Adjust the screen timeout

OSD transparency : Adjust the screen transparency

OSD size : Adjust the screen size - Normal / Small

OSD rotation : Rotate the screen - 90° / 180° / 270°

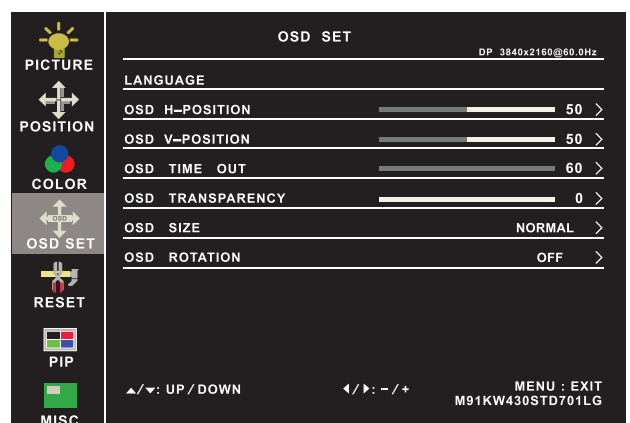


⑤ Reset

Reset : Return the adjustment back to factory setting




⑥ PIP (Not Applicable to F17)

- PIP mode : Enter into PIP / PBP setting - PIP MODE / PBP 2WIN (Main screen + 1 sub screen) / PBP 3WIN (Main screen + 2 sub screen) / PBP 4WIN (Main screen + 3 sub screen)
Select the signal input of each sub screen
- PIP size : Adjust the size of the Sub screen
- Small / Medium / Large / Huge
- PIP position : Adjust the position of the Sub screen
- Top Left / Top Right / Bottom Left / Bottom Right
- Swap : Swap the input signal of PIP / PBP sub screen

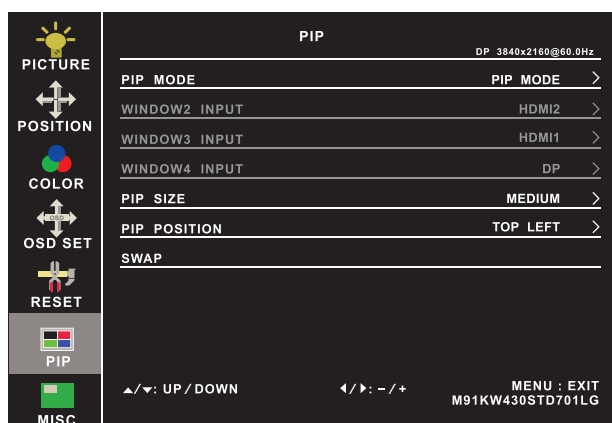


⑦ MISC

- Signal source : Select the signal source - DP / HDMI1 / HDMI2
- Mute : Turn off the surrounding sound
- Audio in : Auto / Line in / DP
- Volume : Adjust the volume of sound
- Sleep mode : Set the off time - 10 min / 20 min / 30 min / 50 min / 60 min / 120 min / 240 min

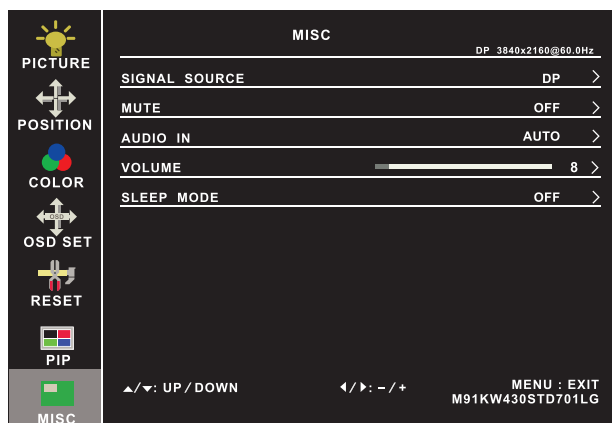

Options on Reset page (Not Applicable to F17)


- Rotation : Rotate the image in Full screen or 1:1
- 90° / 180° / 270°
- Picture size : Adjust the image size in Full screen or 1:1

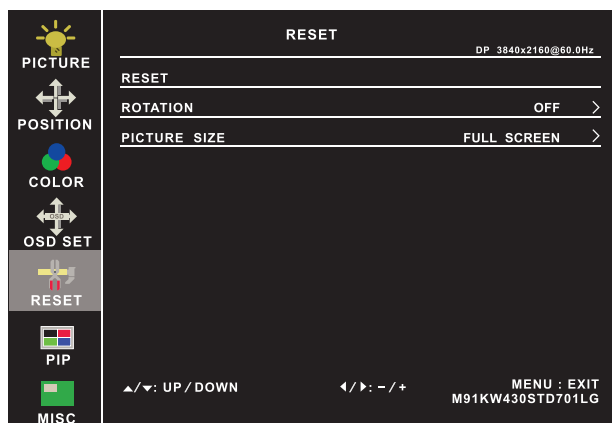

Intentionally Left Blank

< Part 3 >


< 3.1 > Options : 3G / HD / SD-SDI input



Austin Hughes' SDI input is an ideal solution for the broadcast-grade video and high resolution CCTV market.

Designed for use with CyberView displays, a SDI input module can support up to 1080p @60Hz resolution without using additional space or power and it comes standard with a 2-year warranty.

SDI

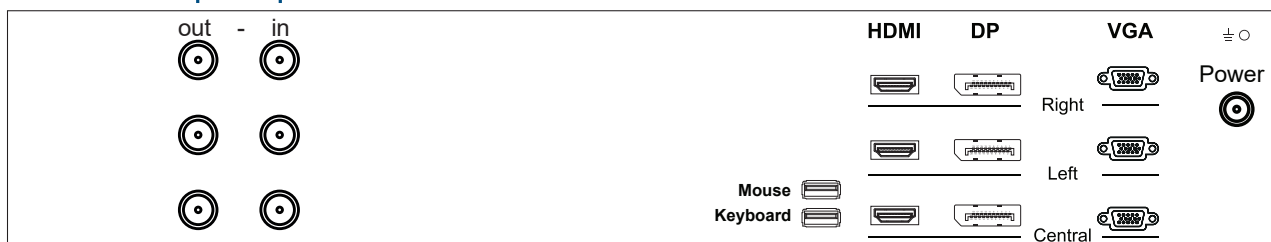

INPUT	3G-SDI IN	BNC x 1 / 0.8Vp-p (75 ohm)
	3G-SDI OUT	BNC x 1 / Active through, equalized & relocked

Standard Compliance	Video	SMPTE 425M / 274M / 296M / 125M ITU-R BT.656
	Audio	SMPTE 299M / 272M-C

Compatible Video Format	3G-SDI	1080p @60 / 50Hz, 4:2:2
		1080p @30 / 25 / 24Hz, 4:4:4
		1080i @60 / 50Hz, 4:4:4
		720p @60 / 50Hz, 4:4:4
	HD-SDI	1080p @30 / 25 / 24Hz, 4:2:2
		1080i @60 / 50Hz, 4:2:2
		720p @60 / 50Hz, 4:2:2
	SD-SDI	480i @60Hz, 4:2:2
	ITU-R BT.656	576i @50Hz, 4:2:2

Compatible Audio Format	3G-SDI	48kHz, 16 / 20 / 24 bit, 2 CH, Synchronized Video
	HD-SDI	48kHz, 16 / 20 / 24 bit, 2 CH, Synchronized Video
	SD-SDI	48kHz, 16 / 20 / 24 bit, 2 CH, Synchronized / Asynchronous Video

Max. Transmission Distance 75 ohm coaxial cable	3G-SDI	150m at 2.97Gb/s
	HD-SDI	250m at 1.485Gb/s
	SD-SDI	480m at 270Mb/s

< 3.2 > Options : Touchscreen & driver

Capacitive Touch screen Specification

	MRK-K17	MRK-F17	MRK-X17
Model	TPC-10 Multi-touch		
Technology	Projected Capacitive		
Touch Point	10		
Input Type	Finger or Capacitive Stylus		
Resolution	4096 x 4096		
Touch Point Accuracy	± 2 mm		
Response Speed	< 5 ms		
Activation Force	< 5 g		
Surface Hardness	6H		
Light Transmission	> 85%		
Haze	3% ↓		
Durability	50 million touches		
Top Layer	1.8 mm Glass		
Bottom Layer	0.7 mm Sensor Glass		
Thickness	2.7 ± 0.1 mm		
Connector	USB		
Compatibility	Linux / Android / Windows / Mac		

Resistive Touch screen Specification

	MRK-K17	MRK-F17	MRK-X17	MRK-19
Model	TRB e-Resistive			
Technology	5-Wire Resistive			
Touch Point	Single			
Input Type	Finger or Stylus			
Resolution	2048 x 2048			
Response Speed	15 ms			
Activation Force	≤ 50 g			
Surface Hardness	3H			
Light Transmission	80% ± 3%			
Haze	8% ± 3%			
Durability	10 million touches			
Top Layer	ITO Film			
Bottom Layer	ITO Glass			
Thickness	3.2 ± 0.2 mm	2.2 ± 0.2 mm	3.2 ± 0.2 mm	2.2 ± 0.2 mm
Connector	USB Type A			
Compatibility	Windows 7 / XP / Vista, Linux			

- USB touchscreen package includes 1 x 6ft USB cable, quick reference guideline and CD disc
- For detailed information, please refer to the attached CD disc
- As the touchscreen unit is not made of toughened glass, please handle it carefully

TPC-10 Driver



Connect the USB cable from the USB port on the LCD to a computer. The touch screen supports easy Plug-and-Play operations. There is no need to install additional drivers on the computer.

TRB Driver

Please follow the below steps to setup the touch screen:-

Step 1. Run the bundled CD disc or download the driver from the link below :
<http://www.austin-hughes.com/resources/driver/ultraview>


Step 2. Double click the Setup.exe

Step 3. Follow the installation instruction to finish the setup


Step 4. After installation, run the TouchKit program & the “4 point calibration”




Please do the initial calibration after the first setup

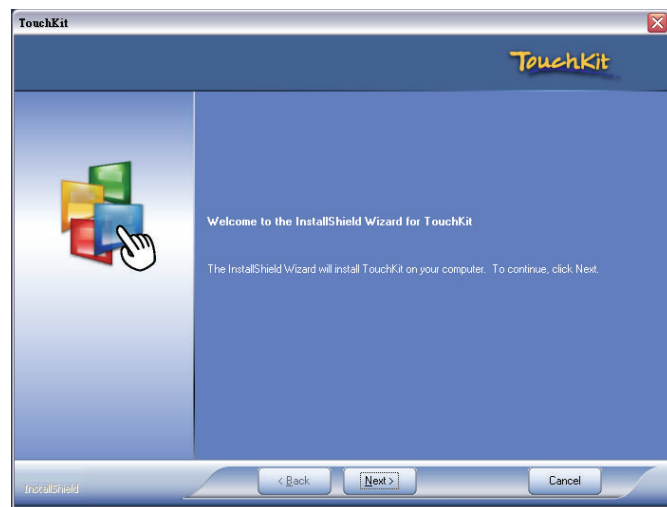

< 3.3 > Options : DC Power



Model	12V	24V	48V	125V	250V
Input rating					
Input voltage:	12-Volt	24-Volt	48-Volt	110-Volt	300-Volt
Input range:	9 ~ 18V	18 ~ 36V	36 ~ 75V	66 ~ 160V	180 ~ 425V
Input current					
- No load	50 mA	50 mA	50 mA	35 mA	10 mA
- Full load	4950 mA	2450 mA	1220 mA	749 mA	600 mA
Output rating					
Output voltage:	12-Volt	12-Volt	12-Volt	12-Volt	12-Volt
Output current:	4.16A	4.16A	4.16A	6.25A	12.5A
Efficiency	84%	85%	85%	91%	86%

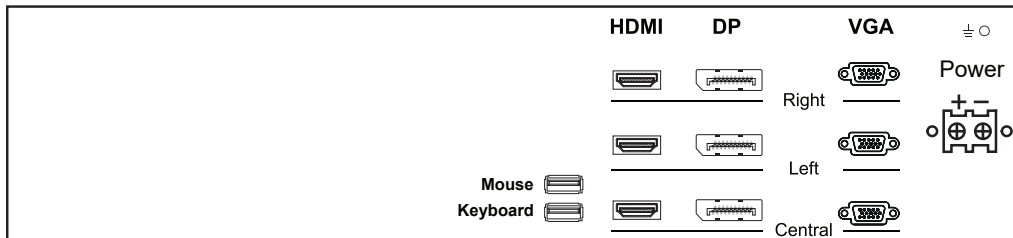


DC power

*** For DC power option :

- (1) If the unit with LCD, earthing may be required 
- (2) DC option excludes AC power adapter and power cord.


< 3.4 > USB Keyboard & Mouse Selector

Optional USB keyboard and mouse selector allows keyboard and mouse to be shared between 2 or 3 computers.
Users can select and switch to any of the connected computers with the press of a button.

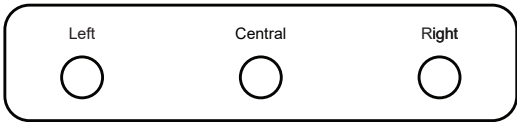

- Selection of Keyboard & Mouse Control**
- Left button : Left side LCD and computer connected
 - Central button : Central LCD and computer connected
 - Right button : Right side LCD and computer connected

Rear I/O after optional upgrade :

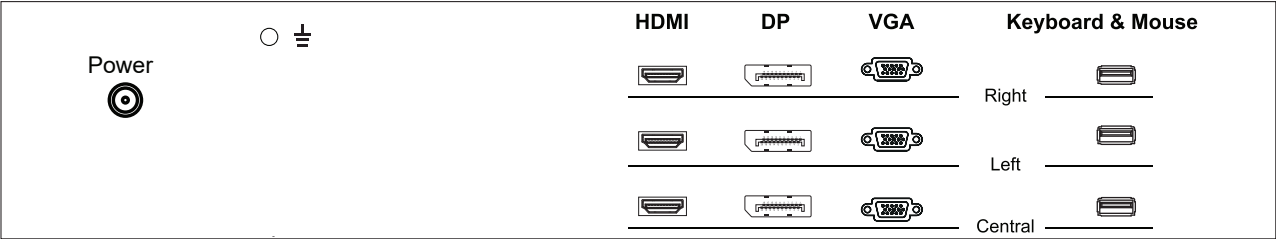

The company reserves the right to modify product specifications without prior notice and assumes no responsibility for any error which may appear in this publication.

All brand names, logo and registered trademarks are properties of their respective owners.

Copyright 2026 Austin Hughes Electronics Ltd. All rights reserved.

UM-CV-751-MRK-Q326V1

www.austin-hughes.com