


## Technical Specifications

<b>Video</b>	
Video Amplifier Bandwidth	1.65 gBPS
Input Video Signal	1.2 volts
Input DDC Signal	5 volts
Single Link Range	1080p
HDMI Connector	HDMI Type A 19 pin female
<b>Control</b>	
	2 front panel buttons
<b>Power</b>	
Power Supply	5VDC-2A
<b>Physical</b>	
Dimensions	12"W x 1.75"H x 7"D
Weight	4.05 lbs.

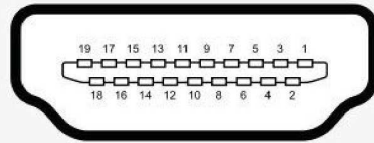

Type A (Female) HDMI

<b>Pin 1</b>	TMDS Data2+
<b>Pin 2</b>	TMDS Data2 Shield
<b>Pin 3</b>	TMDS Data2-
<b>Pin 4</b>	TMDS Data1+
<b>Pin 5</b>	TMDS Data1 Shield
<b>Pin 6</b>	TMDS Data1-
<b>Pin 7</b>	TMDS Data0+
<b>Pin 8</b>	TMDS Data0 Shield
<b>Pin 9</b>	TMDS Data0-
<b>Pin 10</b>	TMDS Clock+
<b>Pin 11</b>	TMDS Clock Shield
<b>Pin 12</b>	TMDS Clock-
<b>Pin 13</b>	CEC
<b>Pin 14</b>	Reserved (N.C. on device)
<b>Pin 15</b>	SCL
<b>Pin 16</b>	SDA
<b>Pin 17</b>	DDC/CEC Ground
<b>Pin 18</b>	+5 V Power (max 50 mA)
<b>Pin 19</b>	Hot Plug Detect

© Copyright 2008 Smart-AVI, All Rights Reserved

### Notice

The information contained in this document is subject to change without notice. Smart-AVI makes no warranty of any kind with regard to this material, including but not limited to, implied warranties of merchantability and fitness for any particular purpose.

Smart-AVI will not be liable for errors contained herein or for incidental or consequential damages in connection with the furnishing, performance or use of this material.

No part of this document may be photocopied, reproduced or translated into another language without prior written consent from Smart-AVI.

For the complete manual, visit [www.smartavi.com](http://www.smartavi.com).



# User Manual

## HDMI Router 4x4



Display content from any four computers on any four screens independently.

**Distributed By:**  
 KVMSwitchTech  
 2000 Auburn Drive, Suite 200  
 Beachwood, OH 44122  
 Tel: 1-866-865-7737  
 Intl: 1-216-378-7866

[www.kvmswitchtech.com](http://www.kvmswitchtech.com)

## Introduction

Our non-blocking matrix switch provides an easy and dynamic approach to creating multiple computer stations, each having the ability of accessing any one of the CPU's or displays instantly.

The SmartAVI HDMI 4x4 router provides single-link HDMI operation at the maximum TMDS rate of 2 x 1.65 Gb/sec. at resolutions up to 1080p and 1920x1200. The HDMI signals can be transmitted through 50 feet of copper at the maximum TMDS rate on both the input and output sides of the switch.


## Features

- Increases your productivity by providing you with access to four computers from four workstations.
- 4x4 non-blocking, single-link HDMI matrix switch.
- Supports HDMI operation at the maximum TMDS rate of 2 x 1.65 Gb/s.
- Supports resolutions up to 1080p, 2K, and 1920 x 1200.
- Simultaneous 4x4 analog matrix switching at 380 MHz bandwidth.
- HDMI transmission over 50 feet at the highest TMDS rate of 1.65 Gb/s.
- Control from front panel.

## What's in the box?

Description	Qty	Part Number
4x4 HDMI Matrix	1	HDMI4X4
5VDC 2A Power Supply	1	PS-5V1A-US
<b>Optional</b>		
HDMI Cable	1	CCHDMIMM06

## Installation Diagram

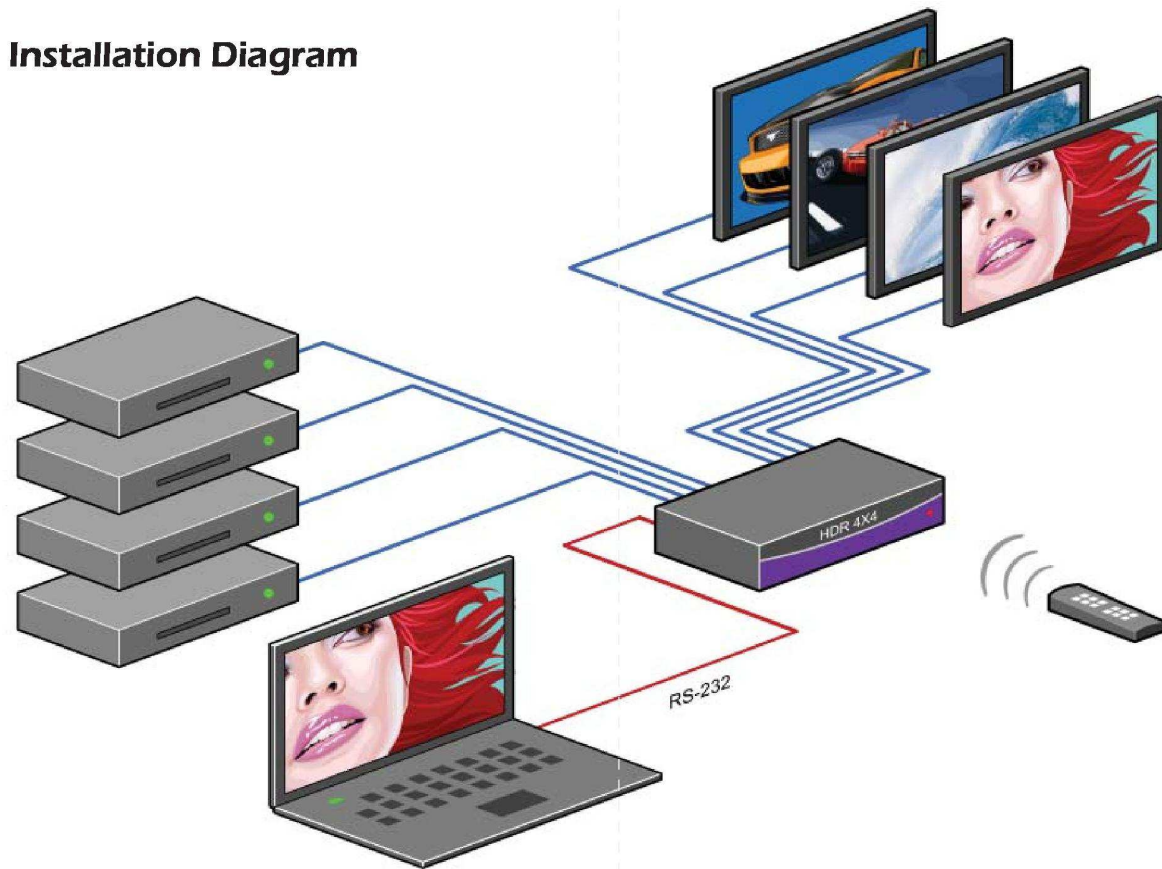

HDMI 4x4 Router Installation Diagram

### Connecting The HDMI Router

1. Connect the HDMI male extension cable between the PC's and the 'video in' port of the HDMI router.
2. Connect the HDMI cables between the monitors and the "HDMI out" ports of router.
3. Connect the power cord and turn on the router.
4. Turn on the PC's and monitors.

